

## M-88 Dynamic Moving Coil Microphone

A dynamic moving-coil microphone having unusually high sensitivity. Excellent front-to-back ratio minimizes feedback problems and supplies excellent discrimination against unwanted sound. Designed for rough handling, humidity and extremes of temperature. Well-suited for broadcasting and TV studios, recording artists, bands and instrumentalists.

*PRICE: \$145.00*

### Specifications:

Frequency response: 40 — 18000 cps

Output level at 1 kc: 0 dbm = 1 mw per 10 ubar

0.28 mv/ubar (—49 dbm)


Polar pattern: cardioid

Output impedance: 200 ohms

Connections: Supplied with connector microphone socket MAK-3100S without cables.

Dimensions: 6.5" x 0.9", head 1.8"

Nominal frequency response

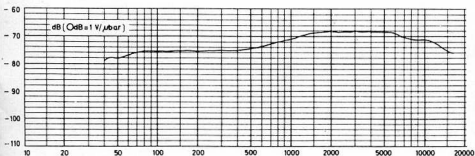

Polar pattern