




BLOCK DIAGRAM

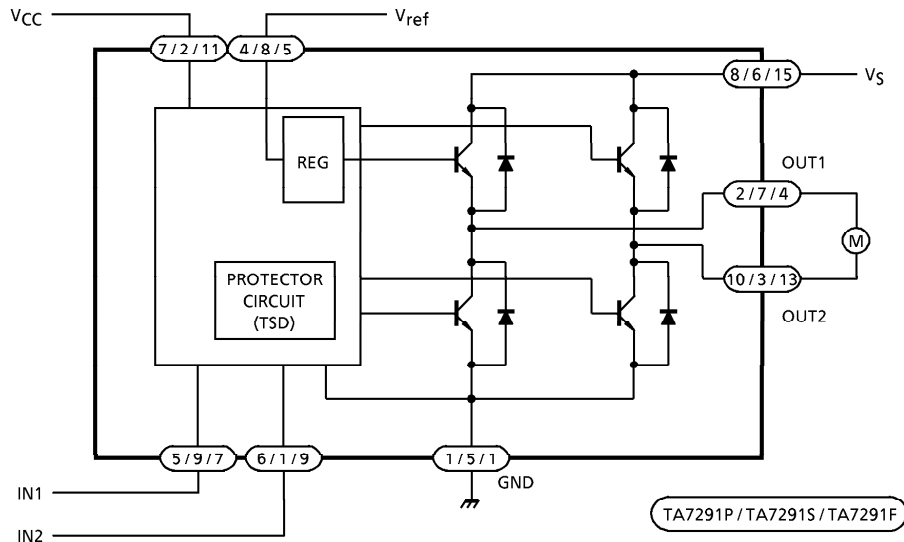

PIN FUNCTION

PIN No.			SYMBOL	FUNCTIONAL DESCRIPTION
P	S	F		
7	2	11	V <sub>CC</sub>	Supply voltage terminal for Logic
8	6	15	V <sub>S</sub>	Supply voltage terminal for Motor driver
4	8	5	V <sub>ref</sub>	Supply voltage terminal for control
1	5	1	GND	GND terminal
5	9	7	IN1	Input terminal
6	1	9	IN2	Input terminal
2	7	4	OUT1	Output terminal
10	3	13	OUT2	Output terminal

P Type : PIN③, ⑨ : NC

S Type : PIN④ : NC

F Type : PIN②, ③, ⑥, ⑧, ⑩, ⑫, ⑭, and ⑯ : NC

For F Type, We recommend FIN to be connected to the GND.

**FUNCTION**

INPUT		OUTPUT		MODE
IN1	IN2	OUT1	OUT2	
0	0	∞	∞	STOP
1	0	H	L	CW / CCW
0	1	L	H	CCW / CW
1	1	L	L	BRAKE

∞ : High impedance

(Note) Inputs are all high active type

**MAXIMUM RATINGS (Ta = 25°C)**

CHARACTERISTIC		SYMBOL	RATING	UNIT	
Supply Voltage		V <sub>CC</sub>	25	V	
Motor Drive Voltage		V <sub>S</sub>	25	V	
Reference Voltage		V <sub>ref</sub>	25	V	
Output Current	PEAK	P Type	I <sub>O</sub> (PEAK)	A	
		S/F Type			2.0
	AVE.	P Type	I <sub>O</sub> (AVE.)		1.2
		S/F Type			1.0
Power Dissipation	P Type	P <sub>D</sub>	(*1) 12.5	W	
	S Type		(*2) 0.95		
	F Type		(*3) 1.4		
Operating Temperature		T <sub>opr</sub>	- 30~75	°C	
Storage Temperature		T <sub>stg</sub>	- 55~150	°C	

(\*1) T<sub>c</sub> = 25°C (TA7291P)

(\*2) No heat sink

(\*3) PCB (60 × 30 × 1.6mm, occupied copper area in excess of 50%) Mounting Condition.


Wide range of operating voltage : V<sub>CC</sub> (opr.) = 4.5~20V  
 V<sub>S</sub> (opr.) = 0~20V  
 V<sub>ref</sub> (opr.) = 0~20V  
 V<sub>ref</sub> ≤ V<sub>S</sub>

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, Ta = 25°C, VCC = 12V, VS = 18V)

CHARACTERISTIC			SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current			ICC1	1	Output OFF, CW/CCW mode	—	8.0	13.0	mA
			ICC2		Output OFF, Stop mode	—	0	50	μA
			ICC3		Output OFF, Brake mode	—	6.5	10.0	mA
Input Operating Voltage	1 (High)	VIN1	2	Tj = 25°C	VIN = 3.5V, Sink mode	3.5	—	5.5	V
	2 (Low)	VIN2				GND	—	0.8	
Input Current					IIN	—	3	10	μA
Input Hysteresis Voltage					ΔVT	—	0.7	—	V
Saturation Voltage	P/S/F Type	Upper Side	VSAT U-1	3	Vref = VS, VOUT – VS measure IO = 0.2A, CW/CCW mode	—	0.9	1.2	V
		Lower Side	VSAT L-1		Vref = VS, VOUT – GND measure IO = 0.2A, CW/CCW mode	—	0.8	1.2	
	S/F Type	Upper Side	VSAT U-2		Vref = VS, VOUT – VS measure IO = 0.4A, CW/CCW mode	—	1.0	1.35	
		Lower Side	VSAT L-2		Vref = VS, VOUT – GND measure IO = 0.4A, CW/CCW mode	—	0.9	1.35	
	P Type	Upper Side	VSAT U-3		Vref = VS, VOUT – VS measure IO = 1.0A, CW/CCW mode	—	1.3	1.8	
		Lower Side	VSAT L-3		Vref = VS, VOUT – GND measure IO = 1.0A, CW/CCW mode	—	1.2	1.85	
Output Voltage (Upper Side)	S/F Type		VSAT U-1'	3	Vref = 10V, VOUT – GND measure IO = 0.2A, CW/CCW mode	—	11.2	—	V
			VSAT U-2'		Vref = 10V, VOUT – GND measure IO = 0.4A, CW/CCW mode	10.4	10.9	12.2	
	P Type		VSAT U-3'		Vref = 10V, VOUT – GND measure IO = 0.5A, CW/CCW mode	—	11.0	—	
			VSAT U-4'		Vref = 10V, VOUT – GND measure IO = 1.0A, CW/CCW mode	10.2	10.7	12.0	
Leakage Current		Upper Side	ILU	4	VL = 25V	—	—	50	μA
		Lower Side	ILL		VL = 25V	—	—	50	
Diode Forward Voltage	S/F Type	Upper Side	VF U-1	5	IF = 0.4A	—	1.5	—	V
	P Type	Lower Side	VF U-2		IF = 1A	—	2.5	—	
	S/F Type	Upper Side	VF L-1		IF = 0.4A	—	0.9	—	
	P Type	Lower Side	VF L-2		IF = 1A	—	1.2	—	
Reference Current			Iref	2	Vref = 10V, Source mode	—	20	40	μA

TEST CIRCUIT 1.


$I_{CC1}$ ,  $I_{CC2}$ ,  $I_{CC3}$

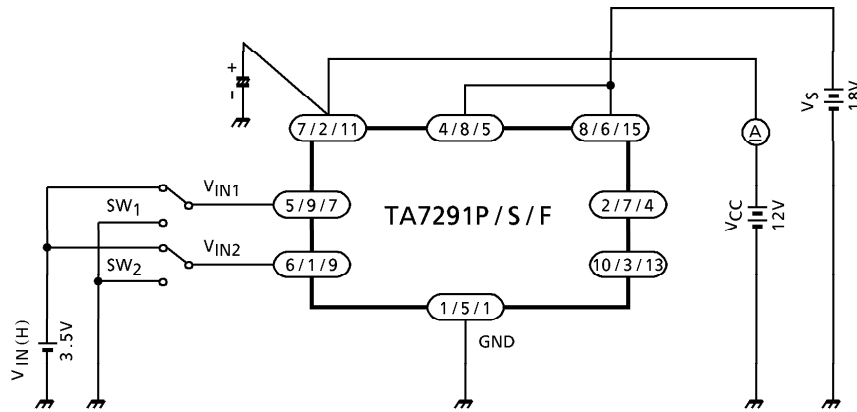

(Note) HEAT FIN of TA7291F is connected to GND.

TEST CIRCUIT 2.

$V_{IN1}$ ,  $V_{IN2}$ ,  $I_{IN}$ ,  $\Delta V_T$ ,  $I_{ref}$

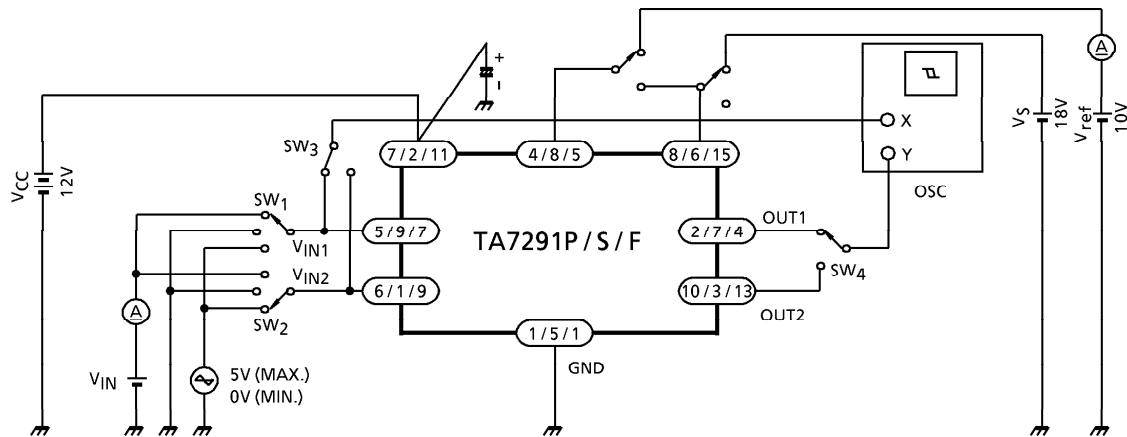


TA7291P/TA7291S/TA7291F

(Note) HEAT FIN of TA7291F is connected to GND.

**TEST CIRCUIT 3.**

$V_{SAT U-1, 2, 3}$   $V_{SAT L-1, 2, 3}$   $V_{SAT U-1', 2', 3', 4'}$

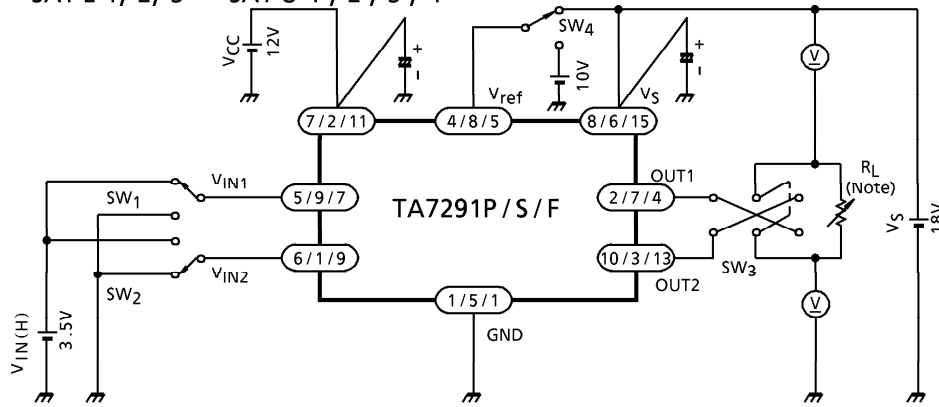


(Note)  $I_{OUT}$  calibration is required to adjust specified values of test conditions by  $R_L$ .  
 ( $I_{OUT} = 0.2A / 0.4A / 0.5A / 1.0A$ )

(Note) HEAT FIN of TA7291F is connected to GND.

**TEST CIRCUIT 4.**


$I_{LU, L}$

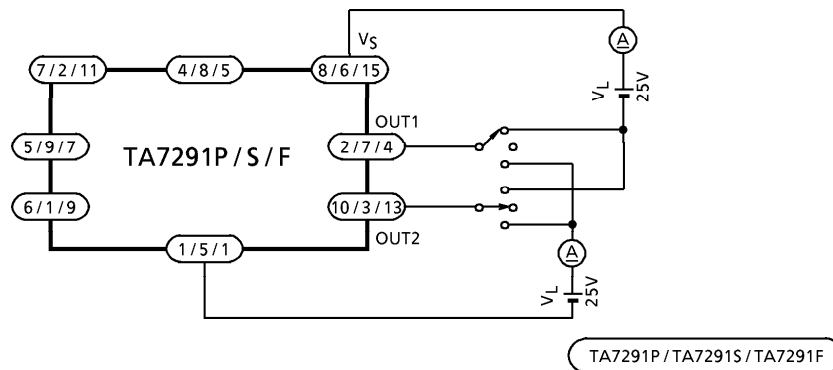

(Note) HEAT FIN of TA7291F is connected to GND.


**TEST CIRCUIT 5.**

$V_{FU-1, 2}$   $V_{FL-1, 2}$

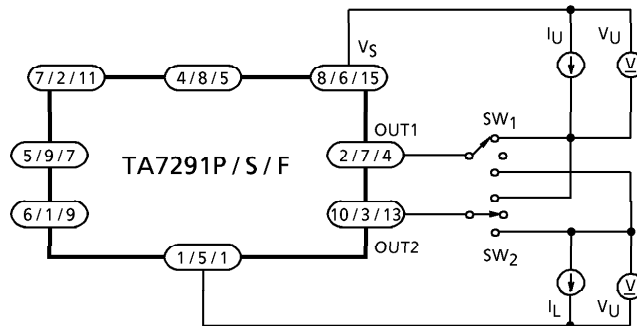


TA7291P

$P_D - T_a$

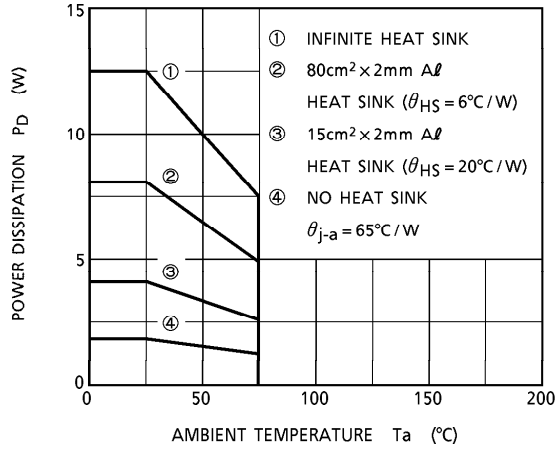


TA7291P

$t - R_{th}$

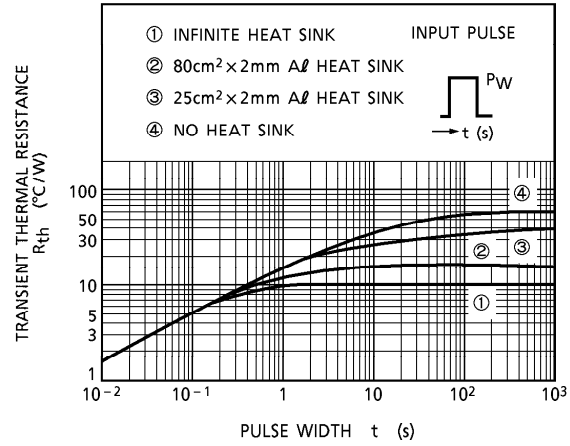


TA7291S

$P_D - T_a$

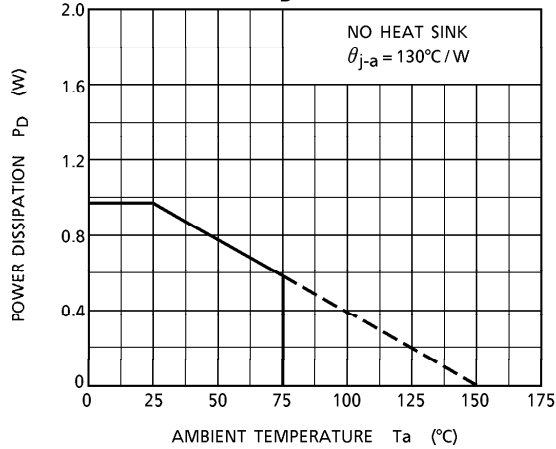


TA7291S

$t - R_{th}$

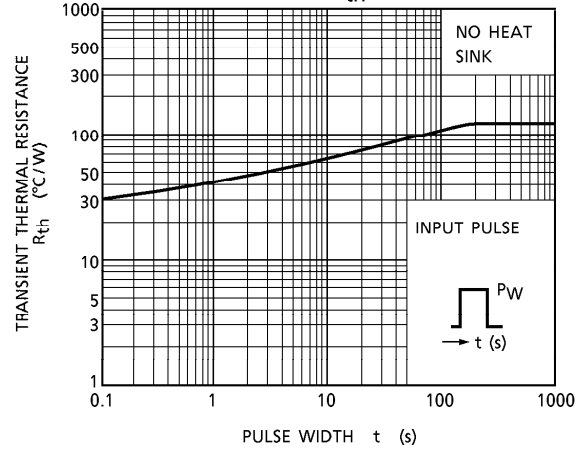


TA7291F

$P_D - T_a$

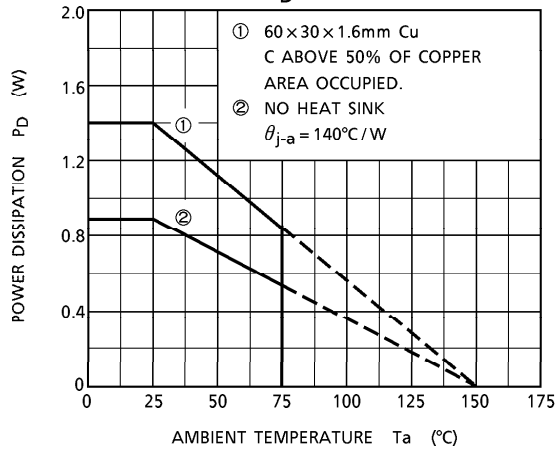


TA7291F

$t - R_{th}$

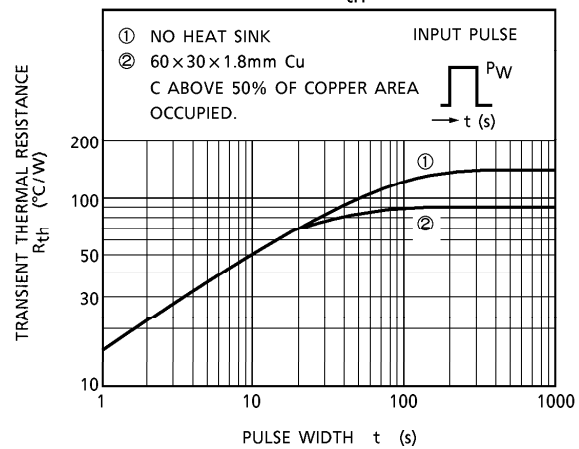


TA7291P/S

VCE (SAT) - IOUT (Upper)


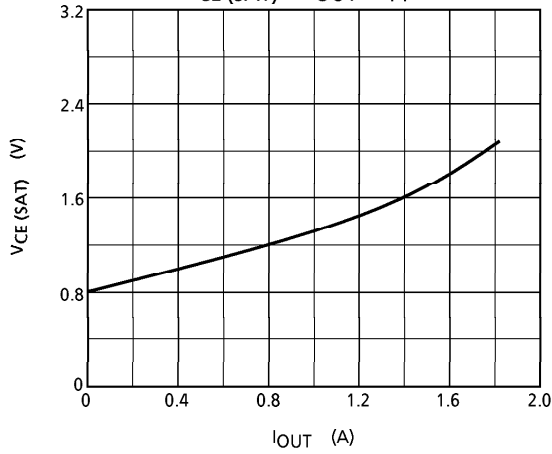


TA7291P/S



VCE (SAT) - IOUT (Lower)

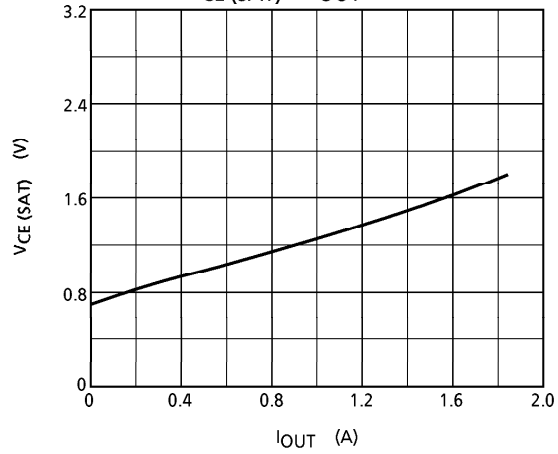

Vref - VOUT (H)

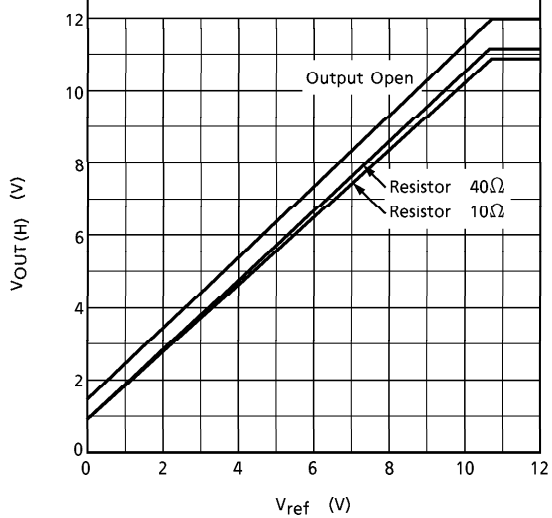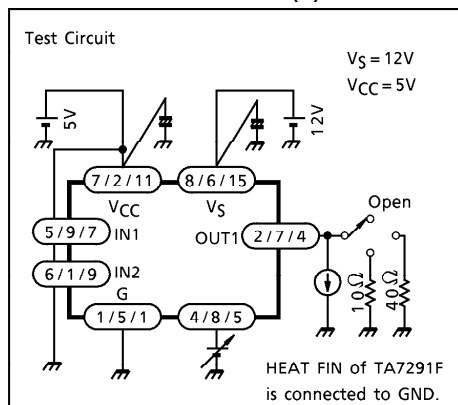

Vs - VOUT (H)

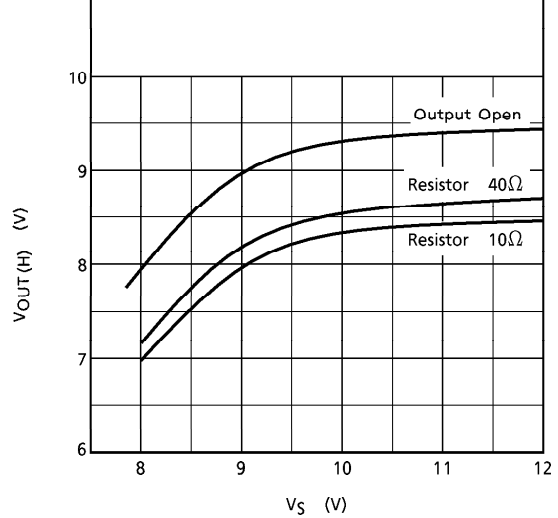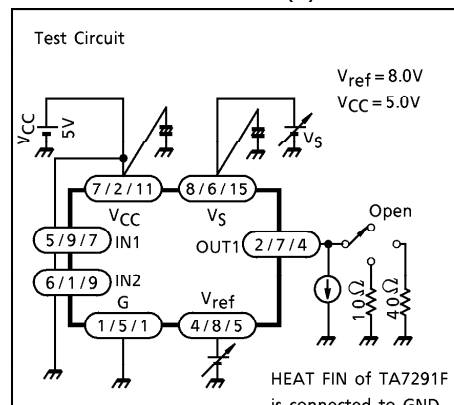




NOTES


Input circuit

Input Terminals of pin⑤ and ⑥ (TA7291P) are all high active type and have a hysteresis of 0.7V (typ.), 3μA (typ.) of source mode input current is required.

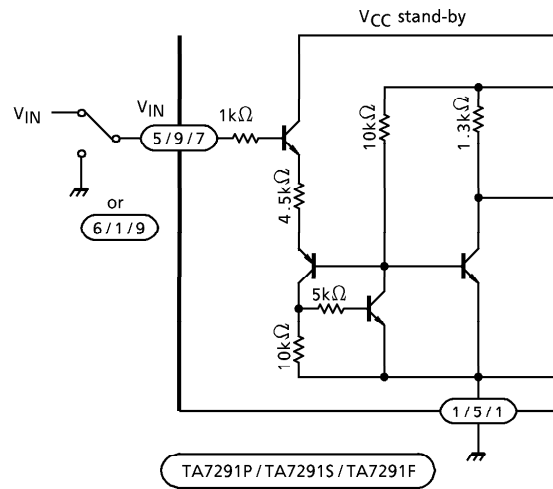


Output circuit

Output voltage is controlled by  $V_{ref}$  voltage.  
 Relationship between  $V_{OUT}$  and  $V_{ref}$  is  
 $V_{OUT} = V_{BE} (\cong 0.7) + V_{ref}$   
 $V_{ref}$  terminal required to connect to  $V_S$  terminal for stable operation in case of no requirement of  $V_{OUT}$  control.  
 $V_{ref} \leq V_S$

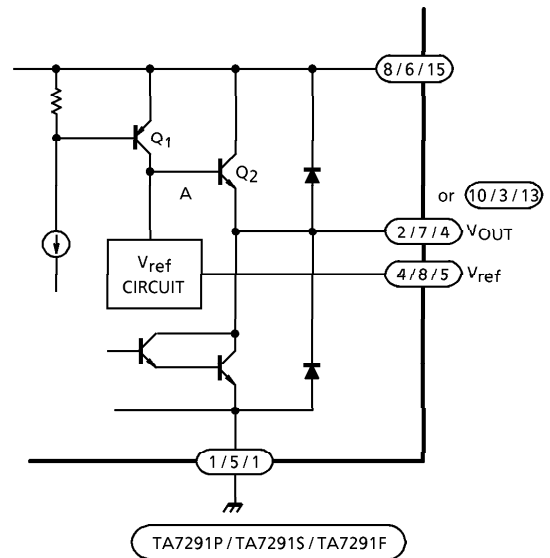

APPLICATION CIRCUIT

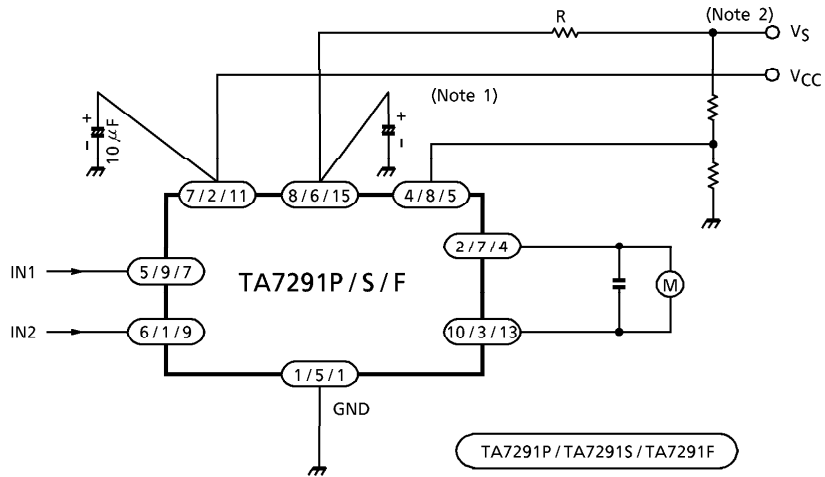


- (Note 1) Experiment to find the optimum capacitor value.
- (Note 2) To protect against excess current, current limitation resistor R should be inserted where necessary.

NOTES

- Be careful when switching the input because rush current may occur. When switching, stop mode should be entered or current limitation resistor R should be inserted.
- The IC functions cannot be guaranteed when turning power on of off. Before using the IC for application, check that there are no problems.
- Utmost care is necessary in the design of the output line, VS, VCC and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.

OUTLINE DRAWING  
HSIP10-P-2.54


Unit : mm

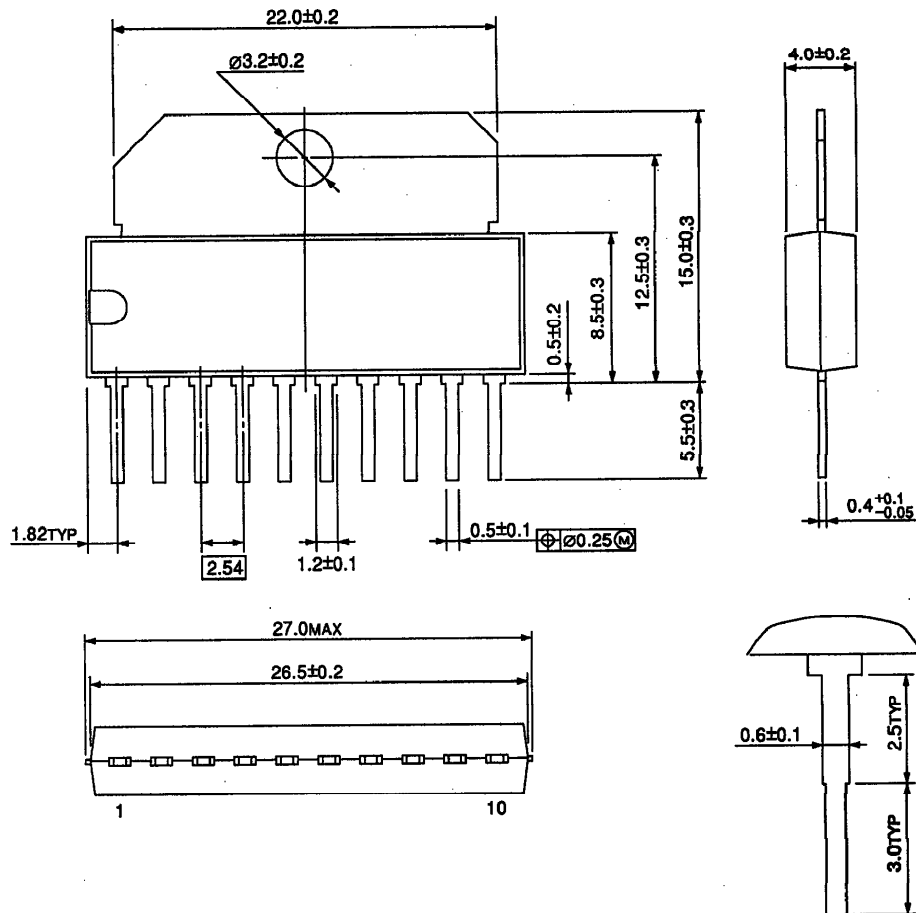

Weight : 2.47g (Typ.)

OUTLINE DRAWING  
SIP9-P-2.54A

Unit : mm

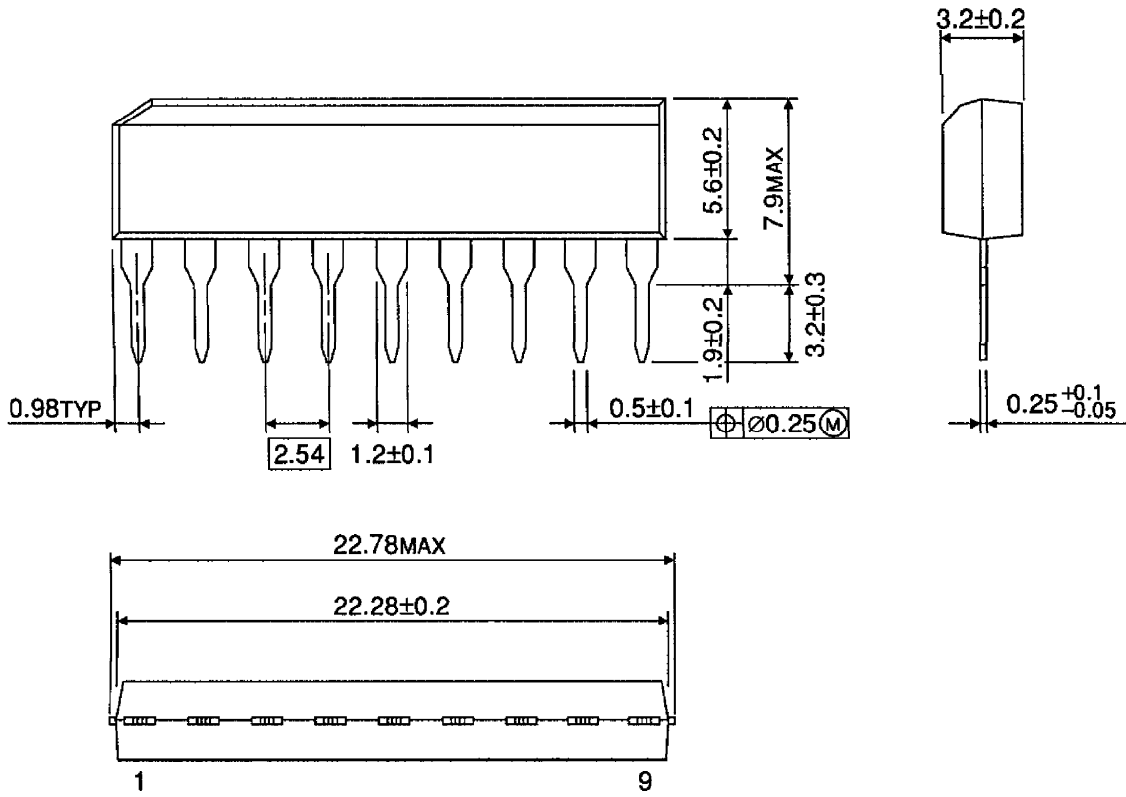


Weight : 0.92g (Typ.)

OUTLINE DRAWING

HSOP16-P-300-1.00

Unit : mm

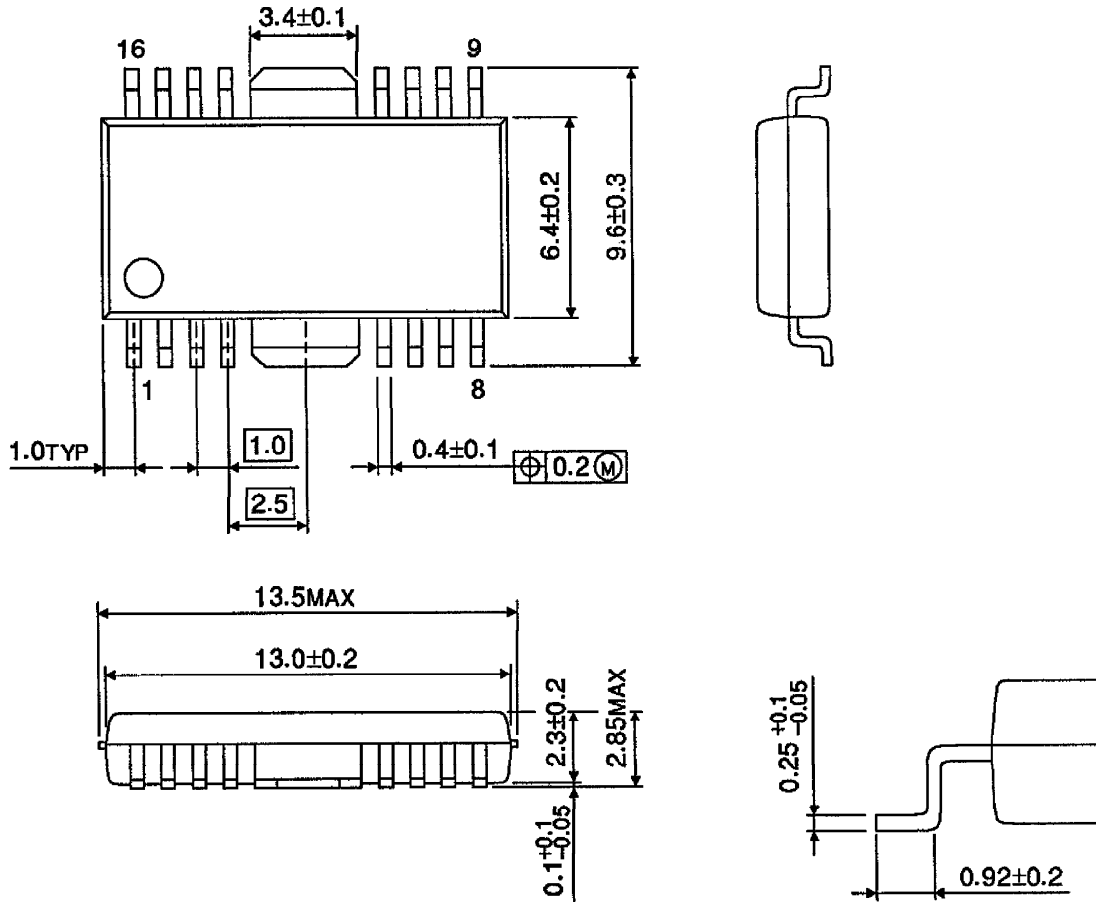

Weight : 0.50g (Typ.)