

NT3

Studio and Location Multi-Powered 3/4" Condenser Microphone

RØDE[®]
MICROPHONES




Features

- True condenser externally biased 3/4" capsule
- Dual power operation
- Cast metal body with durable satin-nickel finish
- Transformerless output
- Internal capsule shock mounting
- High level of RF rejection
- Audio-grade surface mount components
- Full frequency response
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

| | | | |
|--------------------|--|---------------------|---|
| Acoustic Principle | Pressure gradient | Directional Pattern | Cardioid |
| Frequency Range | 20 Hz-20 kHz | Sensitivity | -39 dB re 1 Volt/Pascal (12 mV @ 94 dB SPL) +/- 2 dB @ 1kHz |
| Output Impedence | 200Ω | Dimensions | Length - 206mm (8.1102") Diameter - 32mm (1.2598") |
| Output Connection | 3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground) | Shipping Weight | 640g |
| Net Weight | 371g | | |

Frequency Response

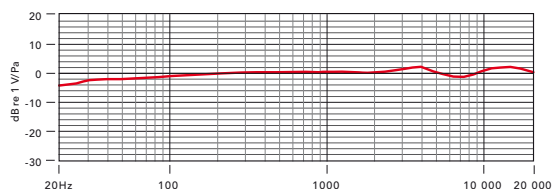

Polar Pattern

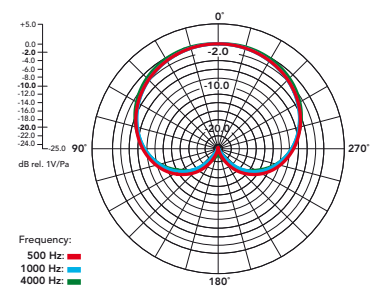

Included Accessories

- RM3 stand mount
- ZP1 zip pouch
- WS3 windshield



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 4189 Santa Barbara CA 93140 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071