

VIDEO AMPLIFIER


HIGH FREQUENCY AMPLIFIERS

MC1510 MC1509

... designed for use as a high-frequency differential amplifier with operating characteristics that provide a flat frequency response from dc to 40 MHz.

Typical Amplifier Features:

- High Gain Characteristics
 $A_V = 93$ typical
- Wide Bandwidth — dc to 40 MHz
- Large Output Voltage Swing —
4.5 V-p-p typical @ ± 6.0 V Supply
- Low Output Distortion —
 $THD \leq 1.5\%$

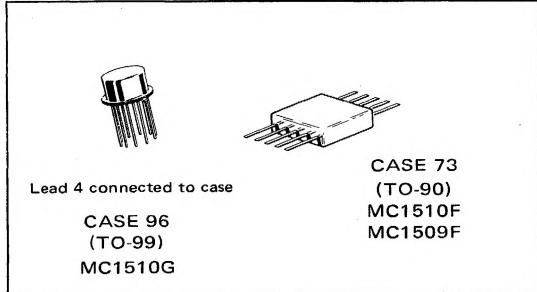


MAXIMUM RATINGS ($T_A = 25^\circ C$ unless otherwise noted)

Rating	Symbol	Value	Unit
Power Supply Voltage	V^+ V^-	+8.0 -8.0	Vdc Vdc
Differential Input Signal	V_{in}	± 5.0	Volts
Common Mode Input Swing	CMV_{in}	± 6.0	Volts
Load Current	I_L	10	mA
Output Short Circuit Duration	t_S	5.0	s
Power Dissipation (Package Limitation)	P_D	680 4.6 500 3.3	mW mW/ $^\circ C$ mW mW/ $^\circ C$
Operating Temperature Range	T_A	-55 to +125	$^\circ C$
Storage Temperature Range	T_{stg}	-65 to +150	$^\circ C$

CIRCUIT SCHEMATIC

EQUIVALENT CIRCUIT

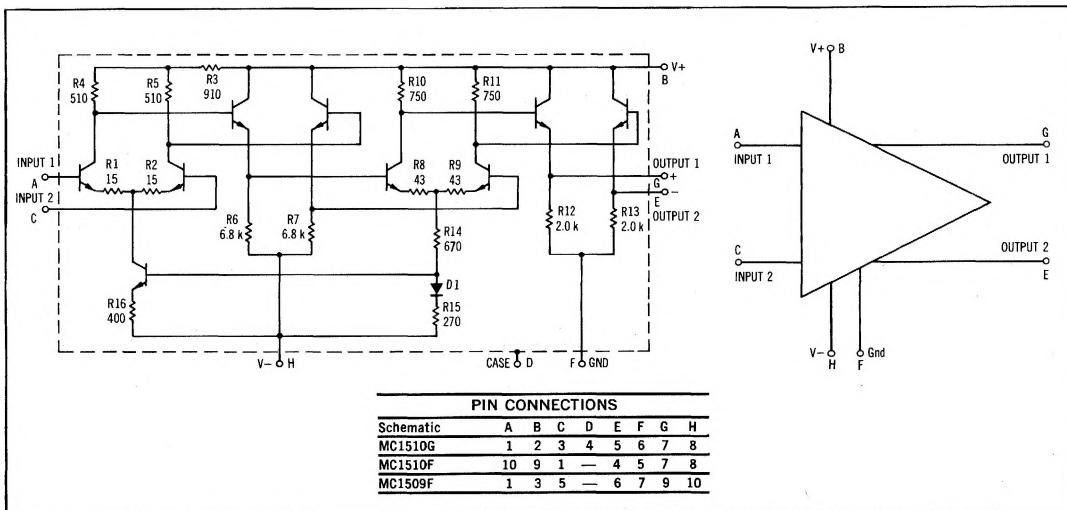

MC1510, MC1509 (continued)

ELECTRICAL CHARACTERISTICS ($V_+ = +6$ Vdc, $V_- = -6$ Vdc, $T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic Definitions	Characteristic	Symbol	Min	Typ	Max	Unit
$A_{VOL} = \frac{e_{out}}{e_{in}}$	Single Ended Voltage Gain	$A_{V(se)}$	75	93	110	-
	Output Impedance ($f = 20$ kHz)	Z_{out}	-	35	-	Ω
	Input Impedance ($f = 20$ kHz)	Z_{in}	-	6.0	-	$k\Omega$
	Bandwidth (-3.0 dB)	BW	-	40	-	MHz
$V_{out} = \frac{e_{out}}{e_{in}}$	Output Voltage Swing ($R_L = 5.0$ k Ω , $f = 100$ kHz)	V_{out}	-	4.5	-	Vp-p
	Single Ended Output Distortion ($e_{in} < 0.2\%$ Distortion)	THD	-	1.5	5.0	%
$A_{VCM} = \frac{e_{out}}{e_{in}}$ $CM_{voltage} = A_{VCM} - A_{VOL}$	Input Common Mode Voltage Swing	CMV_{in}	-	± 1.0	-	V_{peak}
	Common Mode Voltage Gain ($R_L = 5$ k Ω , $e_{in} = 0.3$ V rms, $f = 100$ kHz)	$AVCM$	-30	-45	-	dB
	Common Mode Rejection Ratio	CM_{rej}	-	-85	-	-
$I_b = \frac{I_1 + I_2}{2}$	Input Bias Current	I_b	-	20	80	μA
	($I_b = \frac{I_1 + I_2}{2}$) Differential Output = 0					
$I_{io} = I_1 - I_2$	Input Offset Current	I_{io}	-	3.0	20	μA
	Output Offset Voltage Differential Mode ($V_{in} = 0$)	$V_{out(DM)}$	-	0.5	1.3	Vdc
	Common Mode (Differential Output = 0)	$V_{out(CM)}$	2.6	3.1	3.5	-
$t_r = t_f \leq 1.0 \text{ ns}$	Step Response	t_f t_{pd} t_r	-	9.0 9.0 9.0	12 - 12	ns
$(R_S = 50 \Omega, T_A = -55^\circ\text{C} \text{ to } +125^\circ\text{C})$ $(R_S \leq 10 \text{ k}\Omega, T_A = -55^\circ\text{C} \text{ to } +125^\circ\text{C})$	Average Temperature Coefficient of Input Offset Voltage	TC_{Vio}	-	3.0 6.0	-	$\mu\text{V}/^\circ\text{C}$
	DC Power Dissipation (Power Supply = ± 6.0 V)	P_D	-	150	220	mW
	Input Noise Voltage ($f = 5.0$ Hz to 10 MHz)	V_n	-	4.5	-	μV

MC1510, MC1509 (continued)

FIGURE 1 — VOLTAGE GAIN versus FREQUENCY

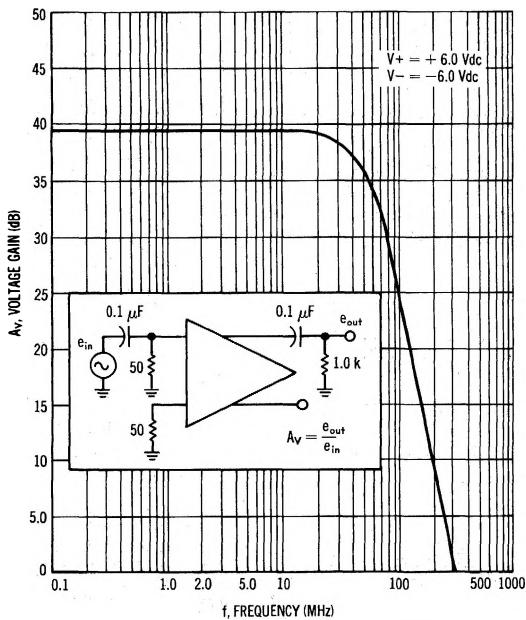


FIGURE 2 — VOLTAGE GAIN versus SUPPLY VOLTAGE

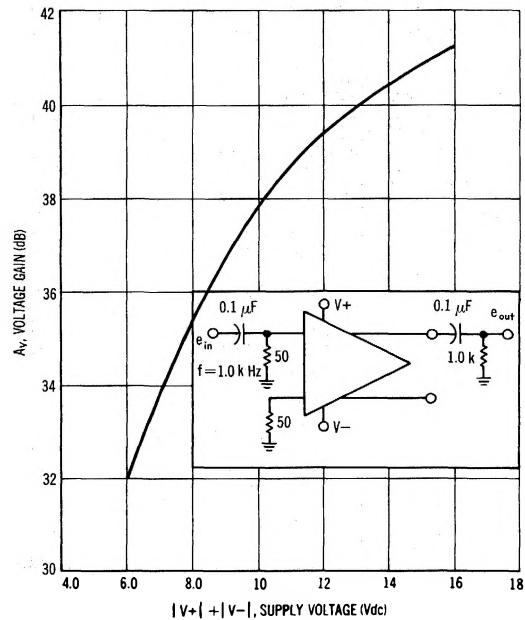


FIGURE 3 — VOLTAGE GAIN versus TEMPERATURE


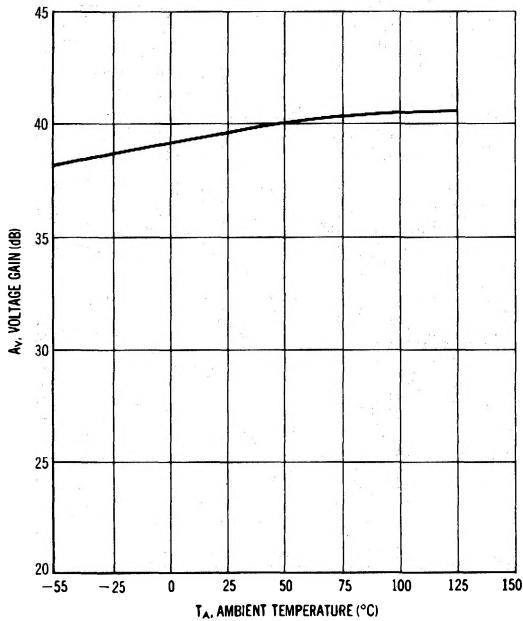


FIGURE 4 — LIMITING CHARACTERISTICS

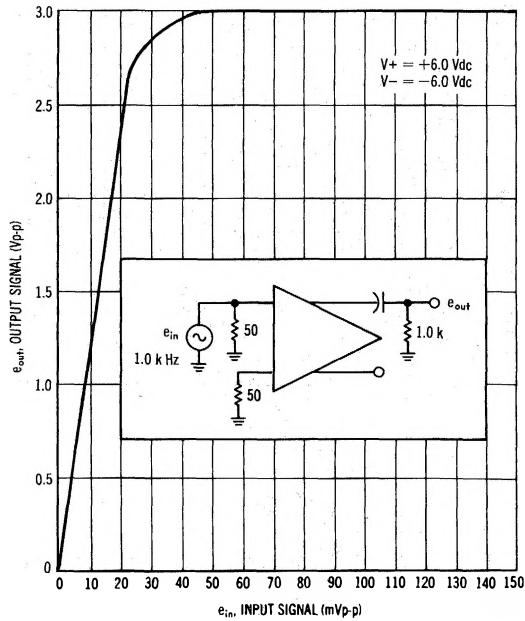

MC1510, MC1509 (continued)

FIGURE 5—DC OUTPUT VOLTAGE versus TEMPERATURE

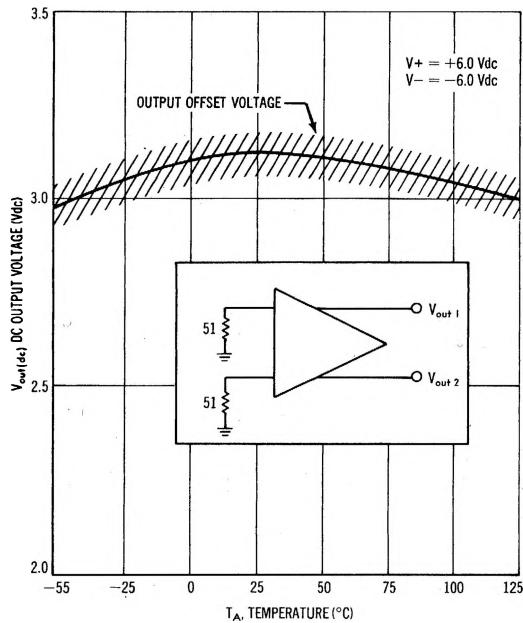


FIGURE 6—INPUT BIAS CURRENT versus TEMPERATURE

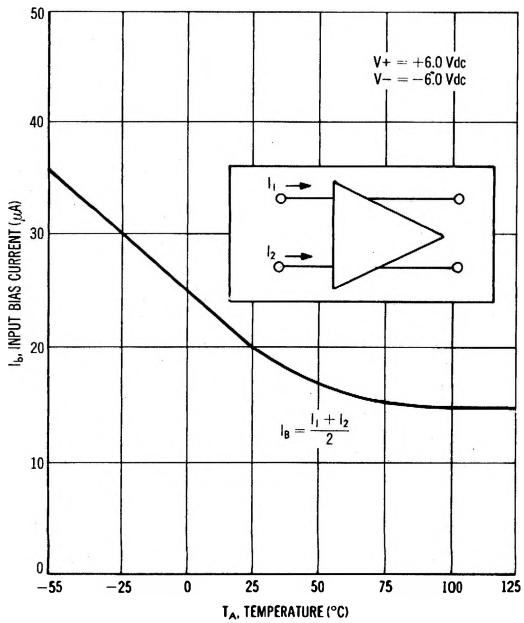


FIGURE 7—POWER DISSIPATION versus SUPPLY VOLTAGE

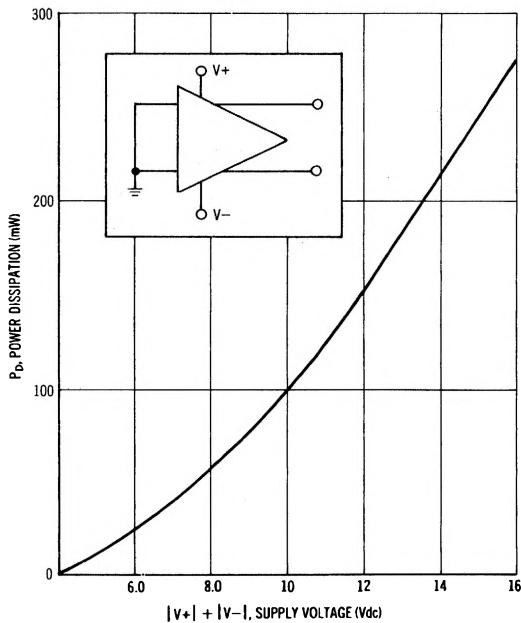


FIGURE 8—INPUT NOISE VOLTAGE versus SOURCE IMPEDANCE

