

## 74LVX02

### Low Voltage Quad 2-Input NOR Gate

#### General Description

The LVX02 contains four 2-input NOR gates. The inputs tolerate voltages up to 7V allowing the interface of 5V systems to 3V systems.

#### Features


- Input voltage level translation from 5V to 3V
- Ideal for low power/low noise 3.3V applications
- Available in SOIC JEDEC, SOIC EIAJ and TSSOP packages
- Guaranteed simultaneous switching noise level and dynamic threshold performance

#### Ordering Code


Order Number	Package Number	Package Description
74LVX02M	M14A	14-Lead (0.150" Wide) Small Outline Package SOIC JEDEC
74LVX02SJ	M14D	14-Lead Small Ouline Package SOIC EIAJ
74LVX02MTC	MTC14	14-Lead Thin Shrink Small Outline Package TSSOP

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

#### Logic Symbol



#### Connection Diagram



#### Pin Descriptions

Pin Names	Description
A <sub>n</sub> , B <sub>n</sub> O <sub>n</sub>	Inputs Outputs

### Absolute Maximum Ratings (Note 1)

Supply Voltage ( $V_{CC}$ )	-0.5V to +7.0V	
DC Input Diode Current ( $I_{IK}$ ) $V_I = -0.5V$	-20 mA	
DC Input Voltage ( $V_I$ )	-0.5V to 7V	
DC Output Diode Current ( $I_{OK}$ ) $V_O = -0.5V$	-20 mA	
$V_O = V_{CC} + 0.5V$	+20 mA	
DC Output Voltage ( $V_O$ )	-0.5V to $V_{CC} + 0.5V$	
DC Output Source or Sink Current ( $I_O$ )	$\pm 25$ mA	
DC $V_{CC}$ or Ground Current ( $I_{CC}$ or $I_{GND}$ )	$\pm 50$ mA	
Storage Temperature ( $T_{STG}$ )	-65°C to +150°C	
Power Dissipation	180 mW	

### Recommended Operating Conditions (Note 2)

Supply Voltage ( $V_{CC}$ )	2.0V to 3.6V
Input Voltage ( $V_I$ )	0V to 5.5V
Output Voltage ( $V_O$ )	0V to $V_{CC}$
Operating Temperature ( $T_A$ )	-40°C to +85°C
Input Rise and Fall Time ( $\Delta t/\Delta V$ )	0 ns/V to 100 ns/V

**Note 1:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:** Unused inputs must be held HIGH or LOW. They may not float.

### DC Electrical Characteristics

Symbol	Parameter	$V_{CC}$	$T_A = +25^\circ C$			Units	Conditions
			Min	Typ	Max		
$V_{IH}$	High Level Input Voltage	2.0	1.5			V	$V_{IN} = V_{IL}$ or $V_{IH}$
		3.0	2.0				
		3.6	2.4				
$V_{IL}$	Low Level Input Voltage	2.0			0.5	V	$V_{IN} = V_{IL}$ or $V_{IH}$
		3.0			0.8		
		3.6			0.8		
$V_{OH}$	High Level Output Voltage	2.0	1.9	2.0		V	$V_{IN} = V_{IL}$ or $V_{IH}$
		3.0	2.9	3.0			
		3.0	2.58		2.48		
$V_{OL}$	Low Level Output Voltage	2.0		0.0	0.1	V	$V_{IN} = V_{IL}$ or $V_{IH}$
		3.0		0.0	0.1		
		3.0			0.36		
$I_{IN}$	Input Leakage Current	3.6		$\pm 0.1$		$\mu A$	$V_{IN} = 5.5V$ or GND
$I_{CC}$	Quiescent Supply Current	3.6		2.0		$\mu A$	$V_{IN} = V_{CC}$ or GND

### Noise Characteristics (Note 3)

Symbol	Parameter	$V_{CC}$ (V)	$T_A = 25^\circ C$		Units	Conditions $C_L$ (pF)
			Typ	Limit		
$V_{OLP}$	Quiet Output Maximum Dynamic $V_{OL}$	3.3	0.3	0.5	V	50
$V_{OLV}$	Quiet Output Minimum Dynamic $V_{OL}$	3.3	-0.3	-0.5	V	50
$V_{IHD}$	Minimum High Level Dynamic Input Voltage	3.3		2.0	V	50
$V_{ILD}$	Maximum Low Level Dynamic Input Voltage	3.3		0.8	V	50

**Note 3:** Input  $t_r = t_f = 3\text{ns}$

## AC Electrical Characteristics

Symbol	Parameter	V <sub>CC</sub> (V)	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40°C to +85°C		Units	C <sub>L</sub> (pF)
			Min	Typ	Max	Min	Max		
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay Time	2.7		5.9	10.7	1.0	13.5	ns	15
				8.4	14.2	1.0	17.0		50
		3.3 ±0.3		4.5	6.6	1.0	8.0	ns	15
				7.0	10.1	1.0	11.5		50
t <sub>OSLH</sub> t <sub>OSSL</sub>	Output to Output Skew (Note 4)	2.7			1.5		1.5	ns	50

Note 4: Parameter guaranteed by design. t<sub>OSLH</sub> = |t<sub>PLHm</sub>-t<sub>PLHm</sub>|, t<sub>OSSL</sub> = |t<sub>PHLm</sub>-t<sub>PHLm</sub>|


## Capacitance

Symbol	Parameter	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40°C to +85°C		Units
		Min	Typ	Max	Min	Max	
C <sub>IN</sub>	Input Capacitance		4	10		10	pF
C <sub>PD</sub>	Power Dissipation Capacitance (Note 5)		15				pF



Note 5: C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation:



$$\text{Average operating current can be obtained by the equation: } I_{CC(\text{opr.})} = \frac{C_{PD} \times V_{CC} \times f_{IN} + I_{CC}}{4 \text{ (per Gate)}}$$



**Physical Dimensions** inches (millimeters) unless otherwise noted

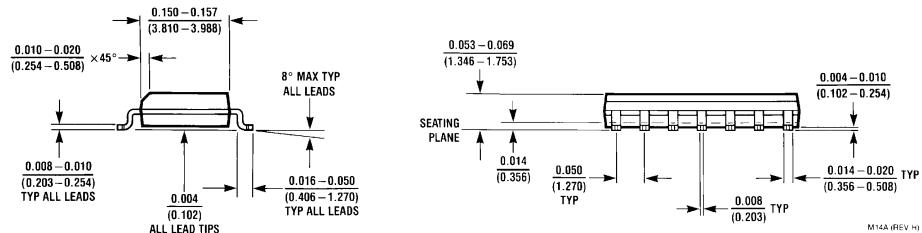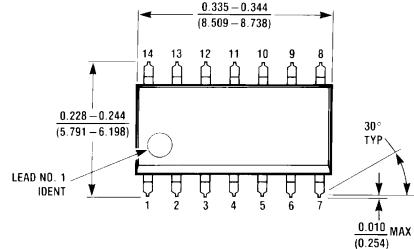


14-Lead (0.150" Wide) Small Outline Package SOIC JEDEC  
Package Number M14A

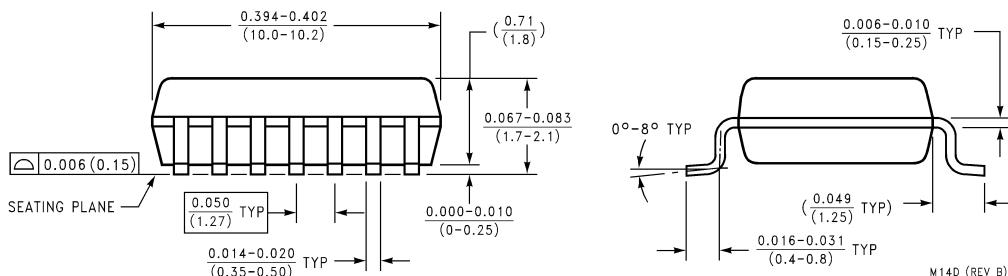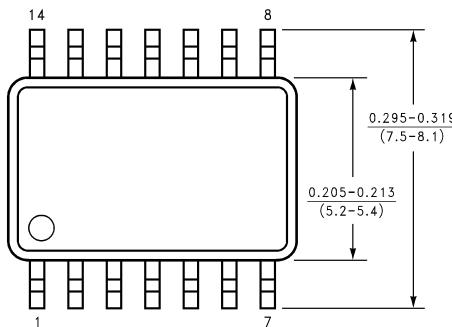

14-Lead Small Outline Package EIAJ  
Package Number M14D

## 74LVX02 Low Voltage Quad 2-Input NOR Gate

### Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

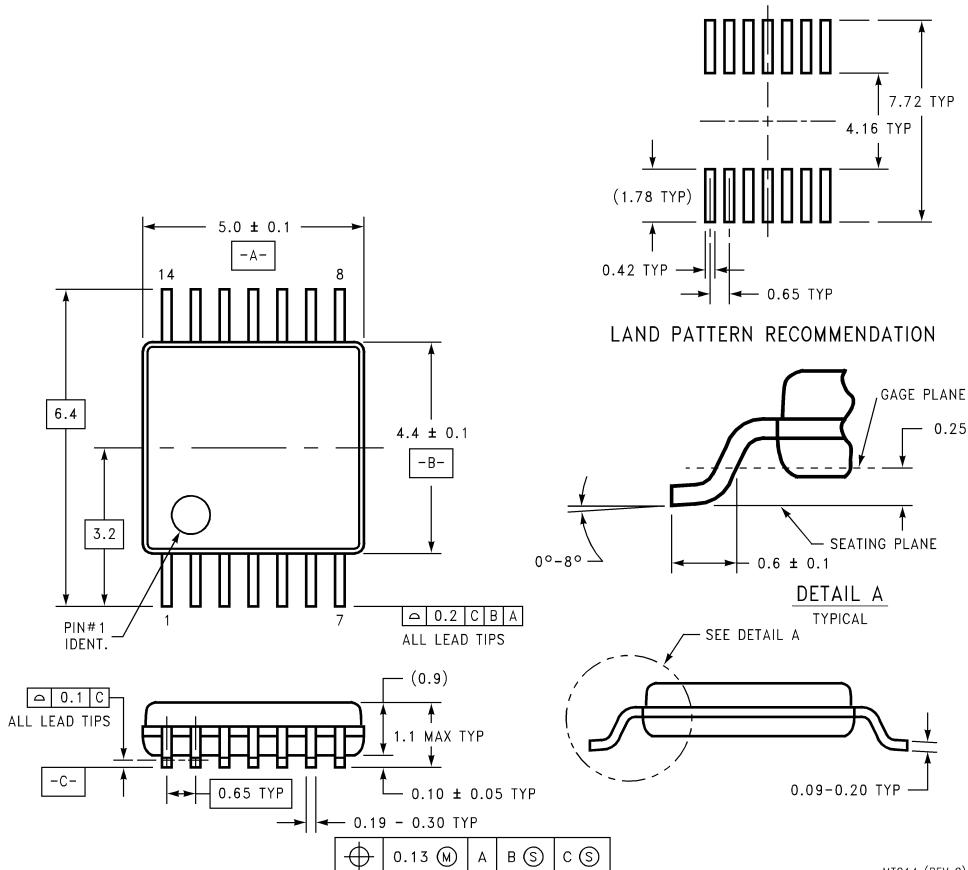

**14-Lead Thin Shrink Small Outline Package, TSSOP  
Package Number MTC14**

MTC14 (REV C)

#### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMI CONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**Fairchild Semiconductor  
Corporation  
Americas**  
Customer Response Center  
Tel: 1-888-522-5372

[www.fairchildsemi.com](http://www.fairchildsemi.com)

**Fairchild Semiconductor  
Europe**  
Fax: +49 (0) 1 80-530 85 86  
Email: europe.support@nsc.com  
Deutsch Tel: +49 (0) 8 141-35-0  
English Tel: +44 (0) 1 793-85-68-56  
Italy Tel: +39 (0) 2 57 5631

**Fairchild Semiconductor  
Hong Kong Ltd.**  
13th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: +852 2737-7200  
Fax: +852 2314-0061

**National Semiconductor  
Japan Ltd.**  
Tel: 81-3-5620-6175  
Fax: 81-3-5620-6179