

9XXX Series

9024

DUAL JK̄ (OR D) FLIP-FLOP

DESCRIPTION — The 9024 consists of two high speed, clocked JK̄ flip-flops. The Clocking operation is independent of rise and fall times of the clock waveform. The JK̄ design allows operation as a D flip-flop by simply connecting the J and K̄ pins together.


ORDERING CODE: See Section 9

PKGS	PIN OUT	COMMERCIAL GRADE	MILITARY GRADE	PKG TYPE
		V _{CC} = +5.0 V ±5%, T _A = 0°C to +75°C	V _{CC} = +5.0 V ±10%, T _A = -55°C to +125°C	
Ceramic DIP (D)	A	9024DC	9024DM	6B
Flatpak (F)	A	9024FC	9024FM	4L


INPUT LOADING/FAN-OUT: See Section 3 for U.L. definitions

PINS	9XXX (U.L.) HIGH/LOW
J, K̄ Inputs	1.5/1.0
Clock, S _D Inputs	3.0/2.0
C̄ _D Input	6.0/3.0
Outputs	30/8.8 (7.8)

CONNECTION DIAGRAM PINOUT A

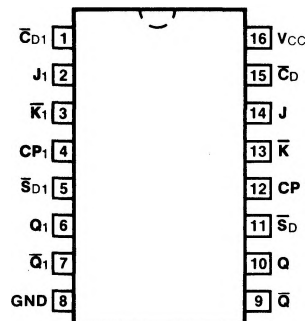

LOGIC SYMBOL

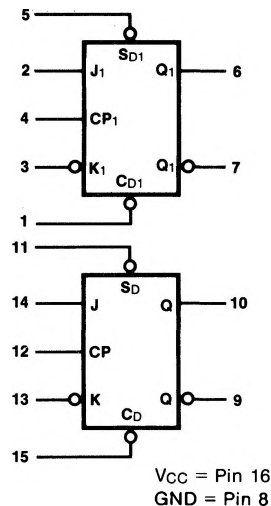

SYNCHRONOUS ENTRY J-K̄ MODE OPERATION

INPUTS @ t _n		OUTPUTS @ t _{n+1}	
J	K̄	Q	Q̄
L	H	No Change	
L	L	L	H
H	H	H	L
H	L	Toggles	

SYNCHRONOUS ENTRY D MODE OPERATION

INPUTS @ t _n	OUTPUTS @ t _{n+1}	
D	Q	Q̄
L	L	H
H	H	L

H = HIGH Voltage Level
L = LOW Voltage Level
t_n, t_{n+1} = time before and after rising edge of CP.

ASYNCHRONOUS ENTRY INDEPENDENT OF CLOCK & SYNCHRONOUS INPUTS

INPUTS		OUTPUTS	
S̄ _D	C̄ _D	Q	Q̄
5(11)	1(15)	6(10)	7(9)
L	L	H	H
L	H	H	L
H	L	L	H
H	H	No Change	

9XXX Series

DC CHARACTERISTICS OVER COMMERCIAL TEMPERATURE RANGE: $V_{CC} = +5.0\text{ V} \pm 5\%$

SYMBOL	PARAMETER	0°C		25°C		75°C		UNITS	CONDITIONS
		Min	Max	Min	Max	Min	Max		
V_{IH}	Input HIGH Voltage	1.9		1.8		1.6		V	Guaranteed Input HIGH Threshold
V_{IL}	Input LOW Voltage		0.85		0.85		0.85	V	Guaranteed Input LOW Threshold
V_{OL}	Output LOW Voltage		0.45		0.45		0.45	V	$V_{CC} = 4.75\text{ V}$, $I_{OL} = 14.1\text{ mA}$
									$V_{CC} = 5.25\text{ V}$, $I_{OL} = 16\text{ mA}$
I_{IH}	Input HIGH Current J, \bar{K} Clock Input, \bar{S}_D \bar{C}_D				60		60	μA	$V_{CC} = 5.25\text{ V}$, $V_{IN} = 4.5\text{ V}$ Gnd on Other Inputs
					120		120		
					240		240		
I_{IL}	Input LOW Current J, \bar{K} Clock Input, \bar{S}_D \bar{C}_D^*		-1.6		-1.6		-1.6	mA	$V_{CC} = 5.25\text{ V}$, $V_{IN} = .45\text{ V}$ 4.5 V on Other Inputs
			-3.2		-3.2		-3.2		
			-4.8		-4.8		-4.8		
I_{IL}	Input LOW Current J, \bar{K} Clock Input, \bar{S}_D \bar{C}_D^*		-1.41		-1.41		-1.41	mA	$V_{CC} = 4.75\text{ V}$, $V_{IN} = .45\text{ V}$ 4.5 V on Other Inputs
			-2.82		-2.82		-2.82		
			-4.23		-4.23		-4.23		
I_{OS}	Output Short Circuit Current	-30	-100	-30	-100	-30	-100	mA	$V_{CC} = 5.25\text{ V}$, $V_{OUT} = 0\text{ V}$
I_{CC}	Power Supply Current				14			mA	Per Flip-Flop in Worst Logic State

*Denotes maximum current under normal operation. These currents may increase up to 4 I_{IL} if J, K = HIGH and $\bar{S}_D = \text{LOW}$.

9XXX Series

DC CHARACTERISTICS OVER MILITARY TEMPERATURE RANGE: $V_{CC} = +5.0 \pm 10\%$

SYMBOL	PARAMETER	-55°C		25°C		125°C		UNITS	CONDITIONS
		Min	Max	Min	Max	Min	Max		
V_{IH}	Input HIGH Voltage	2.0		1.7		1.4		V	Guaranteed Input HIGH Threshold
V_{IL}	Input LOW Voltage	0.8		0.9		0.8		V	Guaranteed Input LOW Threshold
V_{OL}	Output LOW Voltage	0.4		0.4		0.4		V	$V_{CC} = 4.5\text{ V}$, $I_{OL} = 12.4\text{ mA}$ $V_{CC} = 5.5\text{ V}$, $I_{OL} = 16\text{ mA}$
I_{IH}	Input HIGH Current J, \bar{K} Clock Input, \bar{S}_D \bar{C}_D			60 120 240		60 120 240		μA	$V_{CC} = 5.5\text{ V}$, $V_{IN} = 4.5\text{ V}$ Gnd on Other Inputs
I_{IL}	Input LOW Current J, \bar{K} Clock Input, \bar{S}_D \bar{C}_D (Note 4)	-1.6 -3.2 -4.8		-1.6 -3.2 -4.8		-1.6 -3.2 -4.8		mA	$V_{CC} = 5.5\text{ V}$, $V_{IN} = 0.4\text{ V}$ 4.5 V on Other Inputs
	J, \bar{K} Clock Input, \bar{S}_D \bar{C}_D^*	-1.24 -2.48 -3.72		-1.24 -2.48 -3.72		-1.24 -2.48 -3.72		mA	$V_{CC} = 4.5\text{ V}$, $V_{IN} = 0.4\text{ V}$ 4.5 V on Other Inputs
I_{OS}	Output Short Circuit Current	-30	-100	-30	-100	-30	-100	mA	$V_{CC} = 5.5\text{ V}$, $V_{OUT} = 0\text{ V}$
I_{CC}	Power Supply Current			14				mA	Per Flip-Flop in Worst Logic State

*Denotes maximum current under normal operation. These currents may increase up to 4 I_{IL} if J, K = HIGH and \bar{S}_D = LOW.

SWITCHING CHARACTERISTICS: $T_A = 25^\circ\text{C}$, $V_{CC} = +5.0\text{ V}$, $C_L = 15\text{ pF}$

SYMBOL	PARAMETER	9XXX		UNITS	TEST CONDITIONS
		Min	Max		
t_{PLH} t_{PHL}	Propagation Delay CP to Q or \bar{Q}	20 33		ns	Figs. 3-1, 3-8
t_h (H) t_h (L)	Hold Time HIGH or LOW J, \bar{K} to CP	0		ns	Figs. 3-1, 3-6
t_s (H) t_s (L)	Setup Time HIGH or LOW J, \bar{K} to CP	20	1.0	ns	
t_{PLH}	Propagation Delay \bar{S}_D to Q, \bar{C}_D to \bar{Q}	12		ns	Figs. 3-1, 3-16
t_{PHL}	Propagation Delay \bar{S}_D to \bar{Q} , \bar{C}_D to Q	25		ns	
f_{max}	Maximum Toggle Frequency	25		MHz	Figs. 3-1, 3-8