


# Pentoda regulacyjna

# CF3

Philips

Wzmacniacz w. cz.

Bocznostykowy

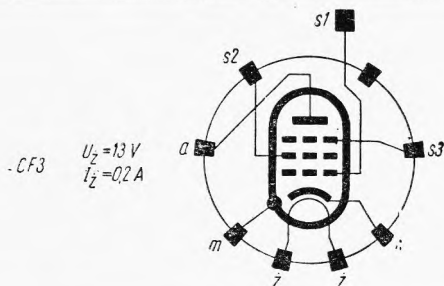

### Wartości robocze


|          |                |             |      |
|----------|----------------|-------------|------|
| $U_a$    | 200            | 200         | V    |
| $U_{s2}$ | 60             | 100         | V    |
| $U_{s1}$ | -2... -35      | -2... -35   | V    |
| $U_{s3}$ | 0              | 0           | V    |
| $I_a$    | 4... 0,03      | 4... 0,03   | mA   |
| $I_{s2}$ | 1,3... 0,01    | 1,3... 0,01 | mA   |
| $S_a$    | 1,5... < 0,002 | —           | mA/V |
| $Q_a$    | 1,3... 10      | 0,25        | MΩ   |
| $R_k$    |                | 250         | Ω    |

### Wartości maksymalne

|              |     |    |
|--------------|-----|----|
| $U_{amax}$   | 250 | V  |
| $U_{s2max}$  | 125 | V  |
| $I_{kmax}$   | 15  | mA |
| $P_{amax}$   | 2   | W  |
| $P_{s2max}$  | 0,4 | W  |
| $R_{s1max}$  | 2,5 | MΩ |
| $U_{w/kmax}$ | 125 | V  |

### Pojemności

|            |         |    |
|------------|---------|----|
| $C_{s1/a}$ | < 0,003 | pF |
|------------|---------|----|

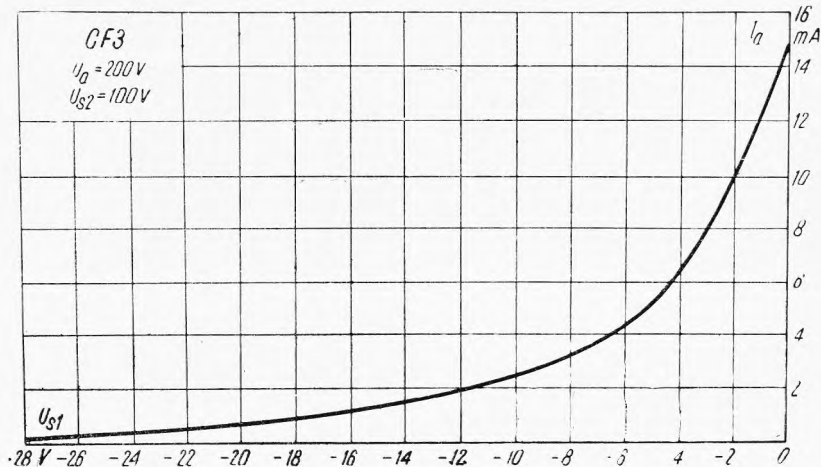

TYPY PODOBNE

AF 3, CF 2