



B 2006

B 2006

TRIODE

(E)

Vf	=	20	.V
If	=	0,18	A.
Va(max)	=	200	V.
Ia	=	15	mA.
Vgl	=	-18	V.
S(max)	=	2,5	mA/V.
S(norm)	=	1,6	mA/V.
g	=	6	
Ri(norm)	=	4.000	Ω
Ra	=	16.000	Ω
Rk	=	1.200	Ω
Wa(max)	=	3	Wtt.
Wo(10%)	=	0,2	Wtt.

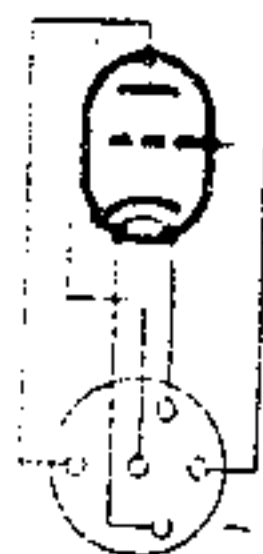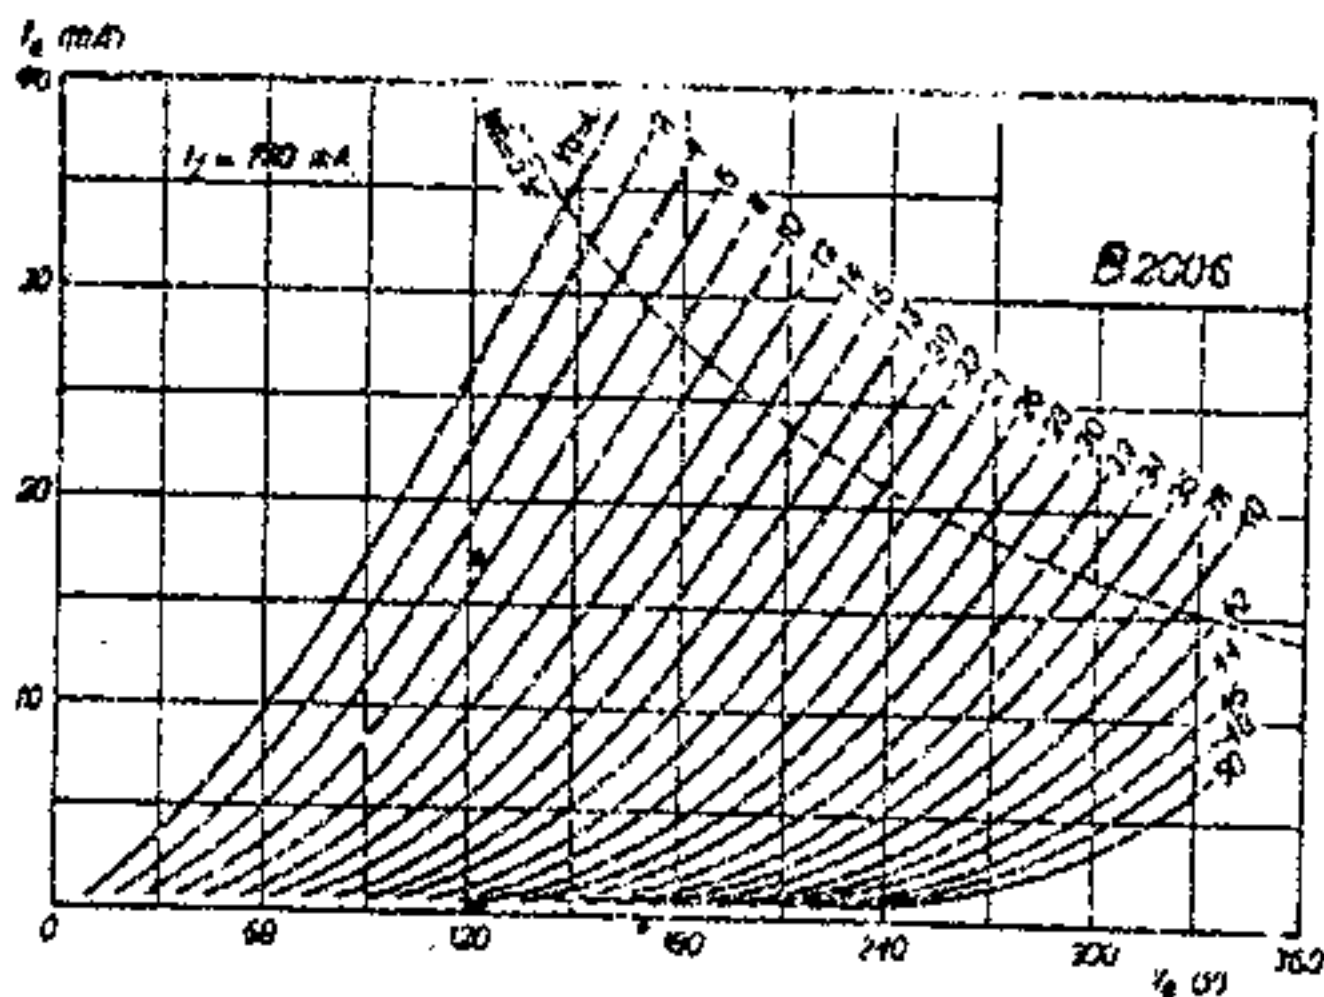

B2006