


Central Semiconductor Corp.

Central Semiconductor Corp.

Central Semiconductor Corp.

Central Semiconductor Corp.

145 Adams Avenue  
Hauppauge, New York 11788



1N4139 THRU 1N4146

SILICON RECTIFIER  
3.0 AMPS, 50 THRU 1200 VOLTS

JEDEC DO-201AD CASE

DESCRIPTION


The CENTRAL SEMICONDUCTOR 1N4139 series types are high quality axial lead silicon power rectifiers designed for power supply and general purpose rectifier applications.

MAXIMUM RATINGS ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

	1N4139	1N4140	1N4141	1N4142	1N4143	1N4144	1N4145	1N4146	UNIT
$V_{RRM}$	50	100	200	400	600	800	1000	1200	V
$V_R$	50	100	200	400	600	800	1000	1200	V
$V_{R(RMS)}$	35	70	140	280	420	560	700	840	V
$I_O$ ( $T_A=110^{\circ}\text{C}$ )				3.0					A
$I_{FSM}$				300					A
$T_J, T_{stg}$				-65 to +175					$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
$V_F$	$I_F=3.0\text{A}$		1.1	V
$I_R$	$V_R=\text{Rated } V_{RRM}$		100	$\mu\text{A}$
$I_R$	$V_R=\text{Rated } V_{RRM}, T_A=150^{\circ}\text{C}$		1.0	mA

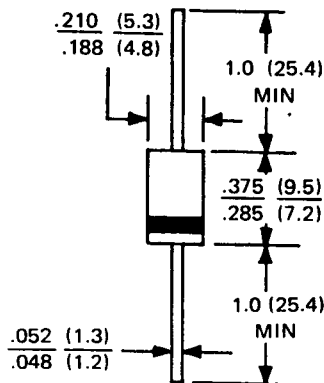

Dimensions in inches and (millimeters)

**Central**<sup>TM</sup>  
**Semiconductor Corp.**

145 Adams Avenue  
Hauppauge, NY 11788 USA  
Tel: (631) 435-1110 • Fax: (631) 435-1824  
www.centralsemi.com