

International  
**IR** Rectifier

60CTQ045

SCHOTTKY RECTIFIER

60 Amp

#### Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform (Per Device)	60	A
$I_{FRM}$ @ $T_C = 113^\circ\text{C}$ (Per Leg)	60	A
$V_{RRM}$	45	V
$I_{FSM}$ @ $t_p = 5 \mu\text{s}$ sine	1500	A
$V_F$ @ $30 \text{ A pk}, T_J = 125^\circ\text{C}$	0.53	V
$T_J$ range	-65 to 150	$^\circ\text{C}$

#### Description/Features

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to  $150^\circ\text{C}$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.


- $150^\circ\text{C } T_J$  operation
- Center tap TO-220 package
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

#### Case Styles

60CTQ045



TO-220



## Voltage Ratings

Parameters	60CTQ045
$V_R$ Max. DC Reverse Voltage (V)	45
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)	

## Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Leg) (Per Device)	30	A	50% duty cycle @ $T_C = 113^\circ\text{C}$ , rectangular wave form
	60		
$I_{FRM}$ Peak Repetitive Forward Current (Per Leg)	60	A	Rated $V_R$ , square wave, 20kHz $T_C = 113^\circ\text{C}$
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg)	1500	A	Following any rated load condition and with rated $V_{RRM}$ applied
	300		
$E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)	20	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 3\text{Amps}$ , $L = 4.40\text{mH}$
$I_{AR}$ Repetitive Avalanche Current (Per Leg)	3	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical

## Electrical Specifications

Parameters	Typ.	Max.	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (1)	0.51	0.56	V	@ 30A $T_J = 25^\circ\text{C}$
	0.66	0.72	V	@ 60A
	0.48	0.53	V	@ 30A $T_J = 125^\circ\text{C}$
	0.68	0.75	V	@ 60A
$I_{RM}$ Max. Instantaneous Reverse Current	0.33	2	mA	$T_J = 25^\circ\text{C}$ Rated DC voltage
	145	250	mA	$T_J = 125^\circ\text{C}$
$C_T$ Max. Junction Capacitance	2000		pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	8.0		nH	Measured from top of terminal to mounting plane
$dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ )	10000		V/ $\mu\text{s}$	

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
$T_J$ Max. Junction Temperature Range	-65 to 150	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-65 to 175	$^\circ\text{C}$	
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)	1.2	$^\circ\text{C/W}$	DC operation
$R_{thCS}$ Typical Thermal Resistance Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)
	Max.	12 (10)	

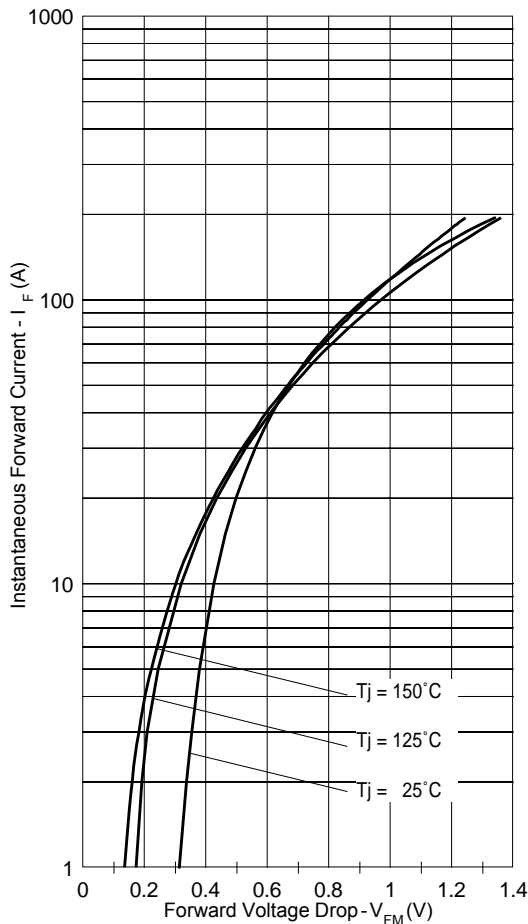


Fig. 1 - Maximum Forward Voltage Drop Characteristics

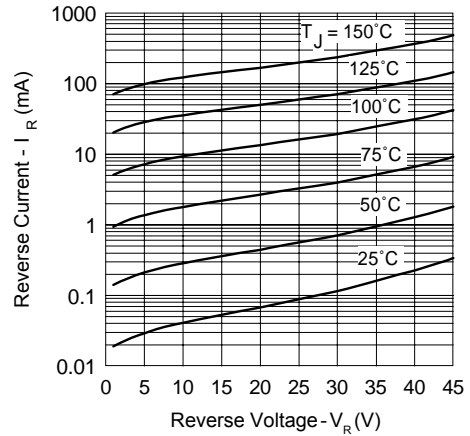


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

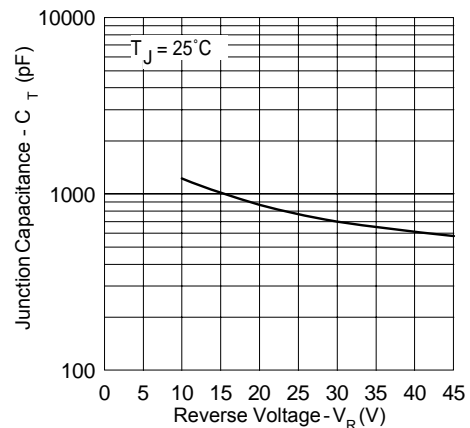


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage



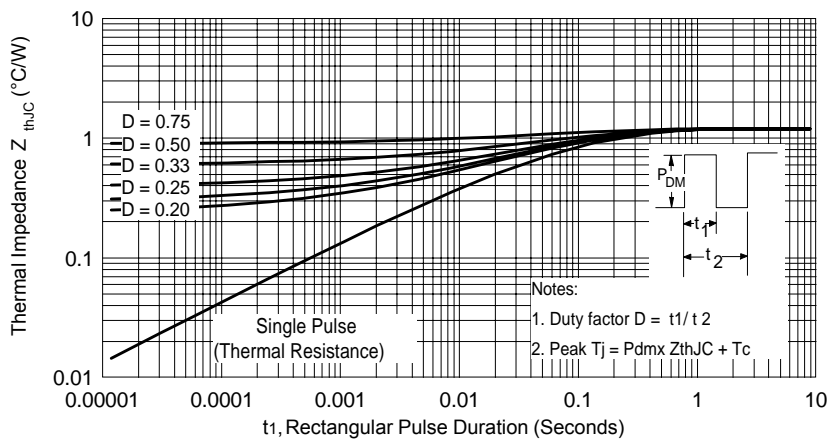



Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics

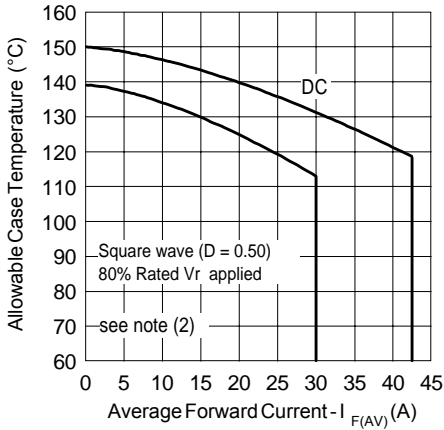

**Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current**

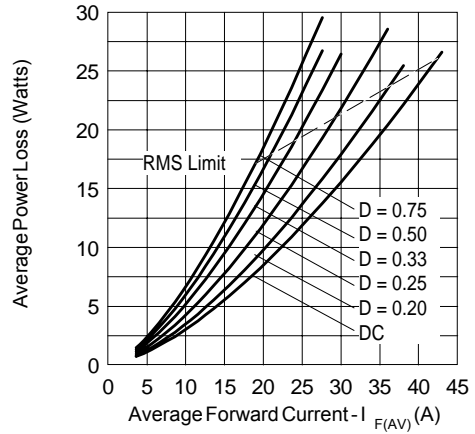


**Fig. 6 - Forward Power Loss Characteristics**

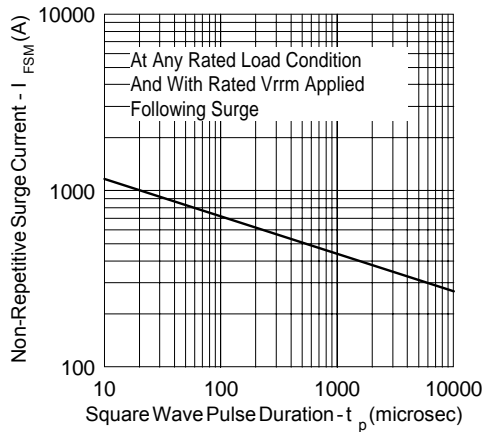


**Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)**

- (2) Formula used:  $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$ ;  
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);  
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = 80\% \text{ rated } V_R$

Outline Table

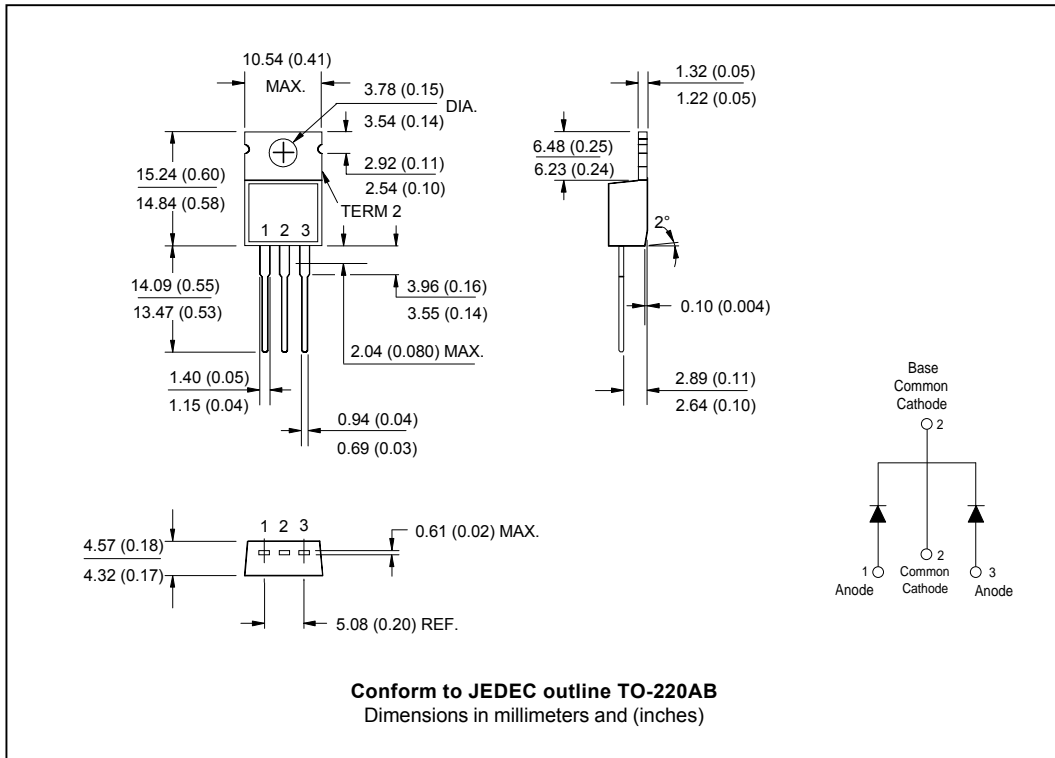

Marking Information

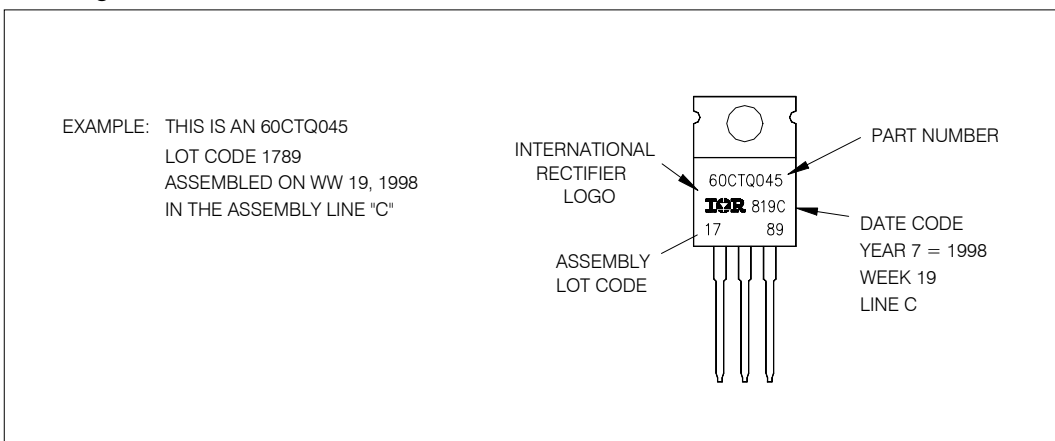

## Ordering Information Table

Device Code				
60	C	T	Q	045
①	②	③	④	⑤
<b>1</b>	-	Essential Part Number		
<b>2</b>	-	Common Cathode		
<b>3</b>	-	T = TO-220		
<b>4</b>	-	Q = Schottky Q Series		
<b>5</b>	-	Voltage Rating		045 = 45V

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level.  
 Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
 TAC Fax: (310) 252-7309  
 Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 12/01