

Rectifier Diodes

Avalanche Diodes

$$V_{RRM} = 800 - 1800 \text{ V}$$


$$I_{F(RMS)} = 160 \text{ A}$$

$$I_{F(AV)M} = 110 \text{ A}$$

V_{RSM} V	$V_{(BR)min}$ ① V	V_{RRM} V	Anode on stud	Cathode on stud
900	-	800	DS 75-08B	DSI 75-08B
1300	-	1200	DS 75-12B	DSI 75-12B
1300	1300	1200	DSA 75-12B	DSAI 75-12B
1700	1760	1600	DSA 75-16B	DSAI 75-16B
1900	1950	1800	DSA 75-18B	DSAI 75-18B

① Only for Avalanche Diodes

DO-203 AB

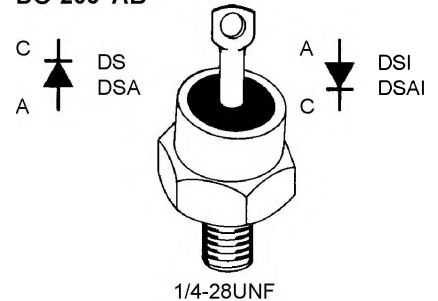

A = Anode C = Cathode

Symbol	Test Conditions	Maximum Ratings	
$I_{F(RMS)}$	$T_{(vj)} = T_{(vj)m}$	160	A
$I_{F(AV)M}$	$T_{case} = 100^\circ\text{C}; 180^\circ \text{ sine}$	110	A
P_{RSM}	DSA(I) types, $T_{(vj)} = T_{(vj)m}, t_p = 10 \mu\text{s}$	20	kW
I_{FSM}	$T_{(vj)} = 45^\circ\text{C}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$	1400 A
		$t = 8.3 \text{ ms (60 Hz), sine}$	1500 A
I^2t	$T_{(vj)} = 45^\circ\text{C}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$	9800 A ² s
		$t = 8.3 \text{ ms (60 Hz), sine}$	9450 A ² s
$T_{(vj)}$	$T_{(vj)m}$	$T_{(vj)} = 45^\circ\text{C}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$
			$t = 8.3 \text{ ms (60 Hz), sine}$
T_{stg}		-40...+180	°C
M_d	Mounting torque	3.5-4.5	Nm
Weight		31-40	lb.in.
		21	g

Features

- International standard package, JEDEC DO-203 AB (DO-5)
- Planar glassivated chips

Applications



- High power rectifiers
- Field supply for DC motors
- Power supplies

Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits

Dimensions in mm (1 mm = 0.0394")

Symbol	Test Conditions	Characteristic Values	
I_R	$T_{(vj)} = T_{(vj)m}; V_R = V_{RRM}$	≤ 6	mA
V_F	$I_F = 150 \text{ A}; T_{(vj)} = 25^\circ\text{C}$	≤ 1.17	V
V_{T0}	For power-loss calculations only	0.75	V
r_T	$T_{(vj)} = T_{(vj)m}$	2	mΩ
R_{thJC}	DC current	0.5	K/W
R_{thJH}	DC current	0.9	K/W
d_s	Creepage distance on surface	4.05	mm
d_A	Strike distance through air	3.9	mm
a	Max. allowable acceleration	100	m/s ²









Data according to IEC 747-2

IXYS reserves the right to change limits, test conditions and dimensions

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS Corporation
 3540 Bassett Street, Santa Clara, CA 95054
 Tel: 408-982-0700 Fax: 408-496-0670

IXYS Semiconductor
 Edisonstr. 15, D-68623 Lampertheim, Germany
 Tel: +49-6206-5030 Fax: +49-6206-503629

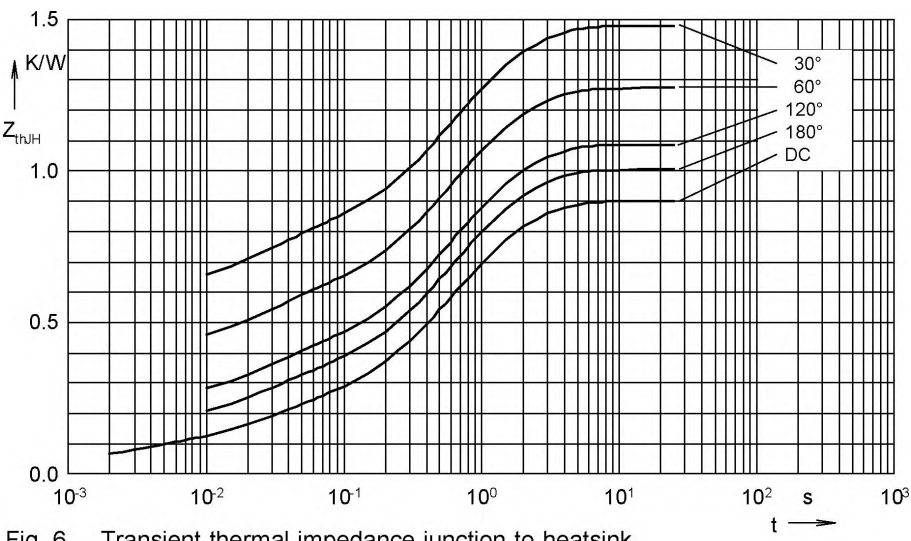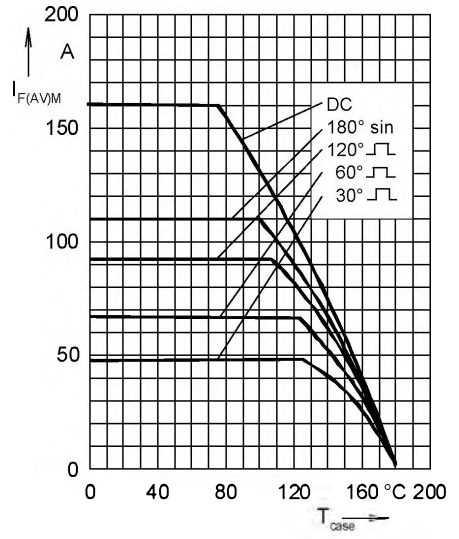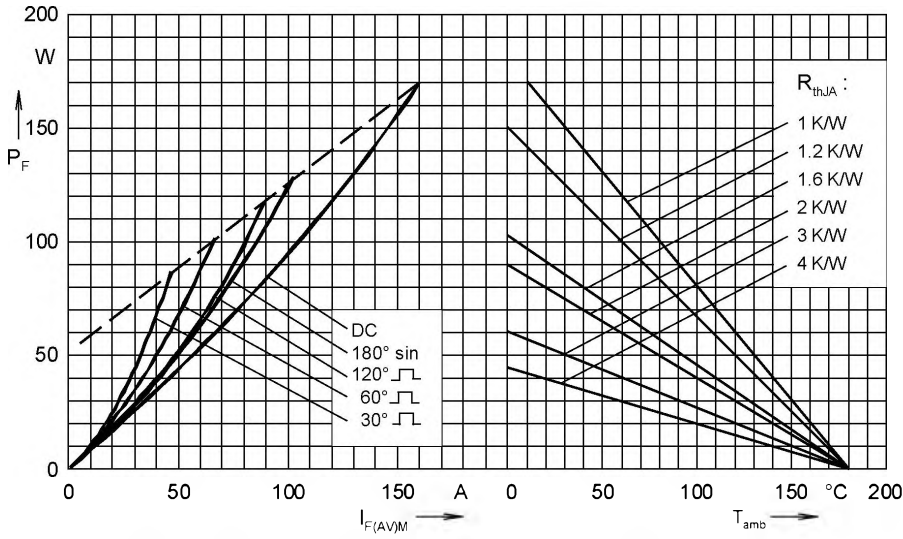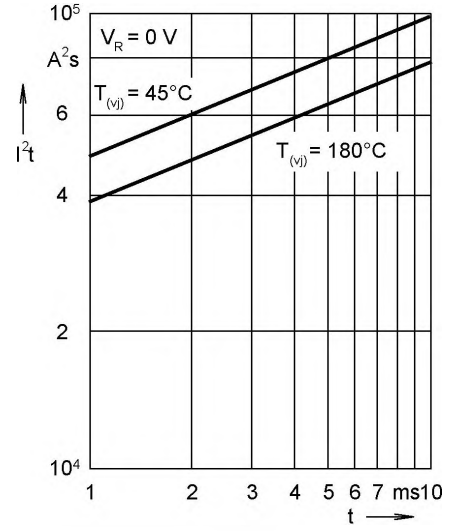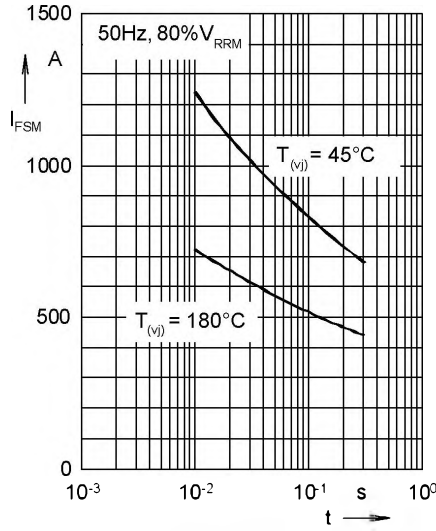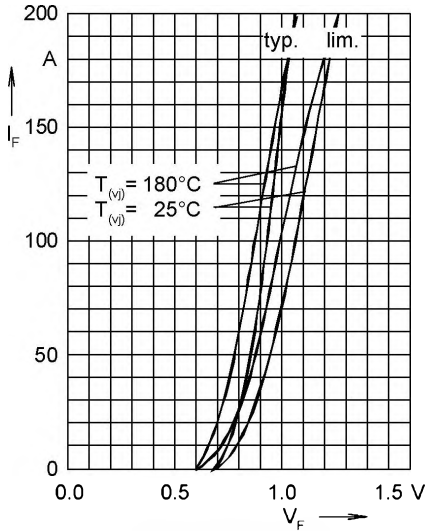

R_{thJH} for various conduction angles d :

d	R_{thJH} (K/W)
DC	0.900
180°	1.028
120°	1.085
60°	1.272
30°	1.476

Constants for Z_{thJH} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0731	0.0015
2	0.1234	0.0237
3	0.4035	0.4838
4	0.3000	1.5