

Rectifier Diodes

Avalanche Diodes

$$V_{RRM} = 800 - 1800 \text{ V}$$


$$I_{F(RMS)} = 160 \text{ A}$$

$$I_{F(AV)M} = 110 \text{ A}$$

V_{RSM} V	$V_{(BR)min}$ ① V	V_{RRM} V	Anode on stud	Cathode on stud
900	-	800	DS 75-08B	DSI 75-08B
1300	-	1200	DS 75-12B	DSI 75-12B
1300	1300	1200	DSA 75-12B	DSAI 75-12B
1700	1760	1600	DSA 75-16B	DSAI 75-16B
1900	1950	1800	DSA 75-18B	DSAI 75-18B

① Only for Avalanche Diodes

DO-203 AB

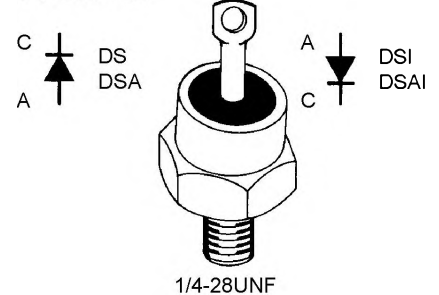

A = Anode C = Cathode

Symbol	Test Conditions	Maximum Ratings	
$I_{F(RMS)}$	$T_{(vj)} = T_{(vj)m}$	160	A
$I_{F(AV)M}$	$T_{case} = 100^\circ\text{C}; 180^\circ \text{ sine}$	110	A
P_{RSM}	DSA(I) types, $T_{(vj)} = T_{(vj)m}$, $t_p = 10 \mu\text{s}$	20	kW
I_{FSM}	$T_{(vj)} = 45^\circ\text{C}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$	1400 A
		$t = 8.3 \text{ ms (60 Hz), sine}$	1500 A
	$T_{(vj)} = T_{(vj)m}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$	1250 A
		$t = 8.3 \text{ ms (60 Hz), sine}$	1310 A
I^2t	$T_{(vj)} = 45^\circ\text{C}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$	9800 A ² s
		$t = 8.3 \text{ ms (60 Hz), sine}$	9450 A ² s
	$T_{(vj)} = T_{(vj)m}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$	7820 A ² s
		$t = 8.3 \text{ ms (60 Hz), sine}$	7210 A ² s
$T_{(vj)}$		-40...+180	°C
$T_{(vj)m}$		180	°C
T_{stg}		-40...+180	°C
M_d	Mounting torque	3.5-4.5	Nm
		31-40	lb.in.
Weight		21	g

Features

- International standard package, JEDEC DO-203 AB (DO-5)
- Planar glassivated chips

Applications


- High power rectifiers
- Field supply for DC motors
- Power supplies

Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits

Dimensions in mm (1 mm = 0.0394")

Symbol	Test Conditions	Characteristic Values	
I_R	$T_{(vj)} = T_{(vj)m}; V_R = V_{RRM}$	≤ 6	mA
V_F	$I_F = 150 \text{ A}; T_{(vj)} = 25^\circ\text{C}$	≤ 1.17	V
V_{T0}	For power-loss calculations only	0.75	V
r_T	$T_{(vj)} = T_{(vj)m}$	2	mΩ
R_{thJC}	DC current	0.5	K/W
R_{thJH}	DC current	0.9	K/W
d_s	Creepage distance on surface	4.05	mm
d_A	Strike distance through air	3.9	mm
a	Max. allowable acceleration	100	m/s ²

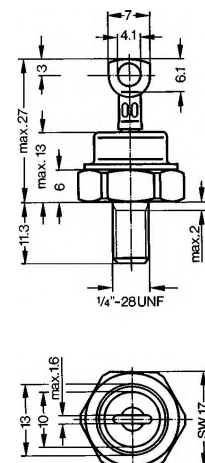

Data according to IEC 747-2

IXYS reserves the right to change limits, test conditions and dimensions

IXYS reserves the right to change limits, test conditions, and dimensions.

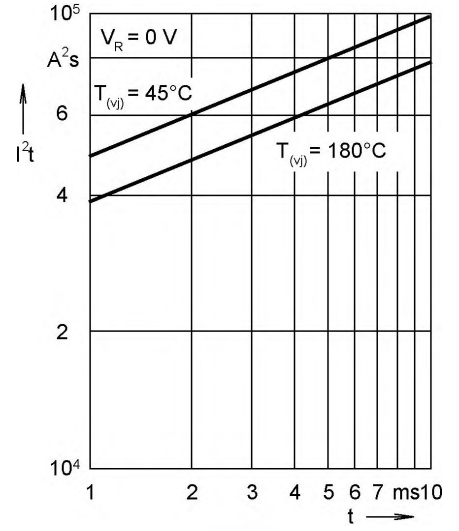
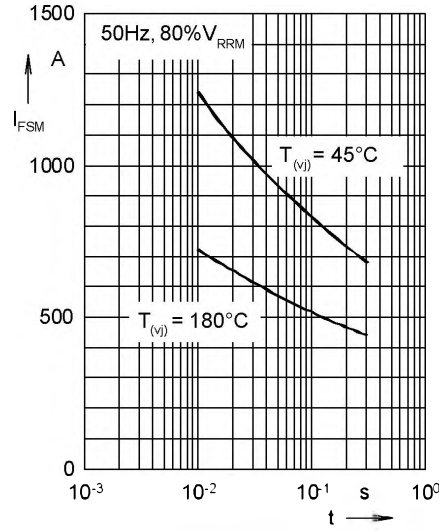
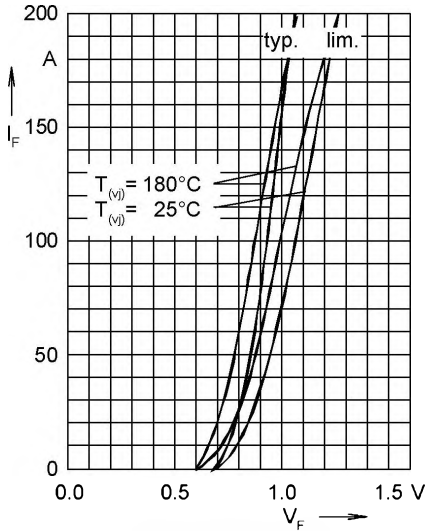


Fig. 1 Forward characteristics

Fig. 2 Surge overload current
 I_{FSM} : Crest value, t : duration

Fig. 3 I^2t versus time (1-10 ms)



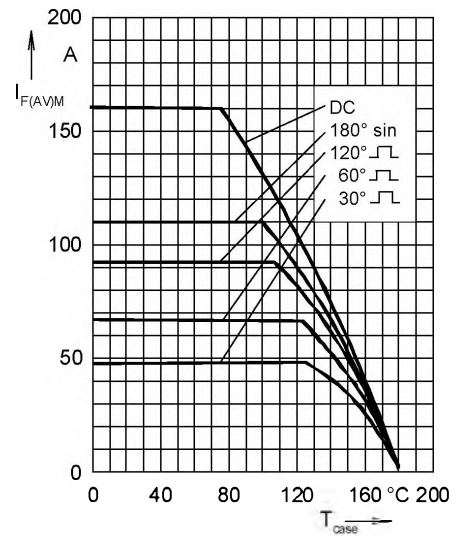


Fig. 4 Power dissipation versus forward current and ambient temperature

Fig. 5 Max. forward current at case temperature

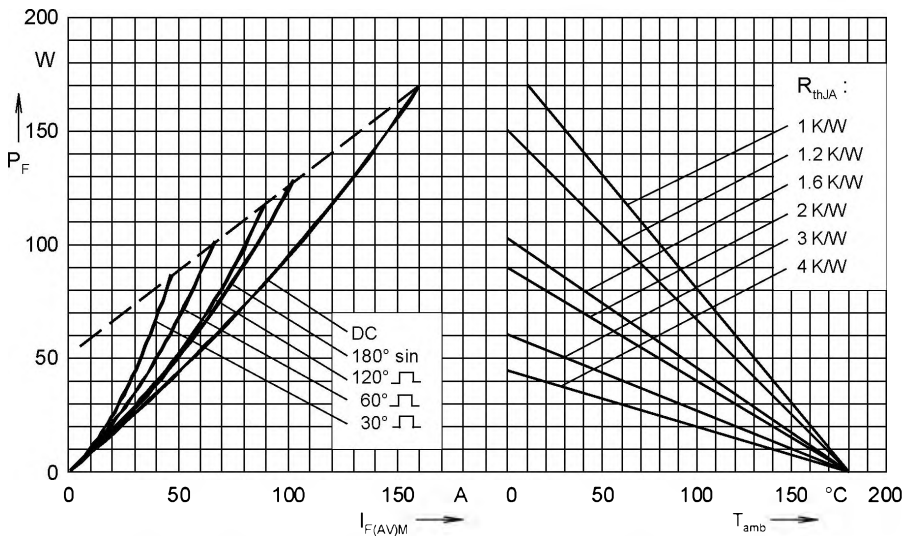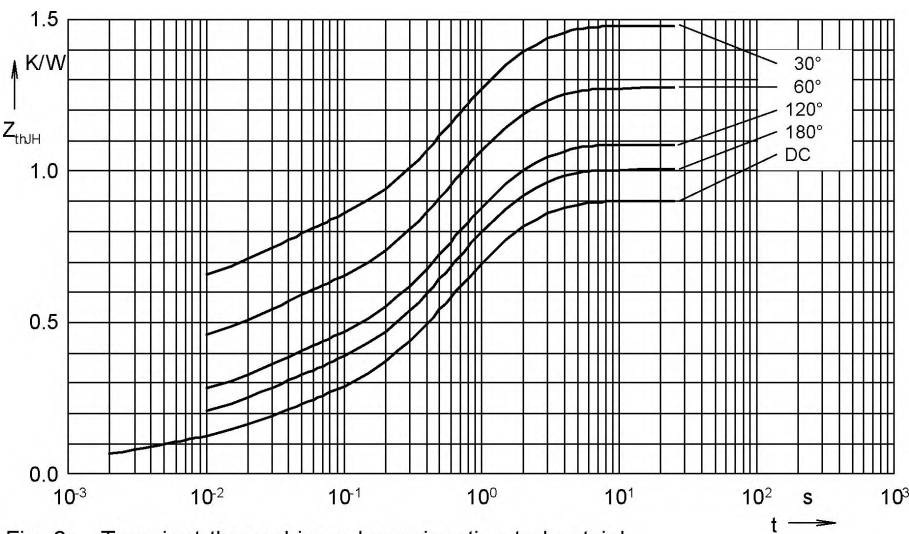

R_{thJH} for various conduction angles d :

d	R_{thJH} (K/W)
DC	0.900
180°	1.028
120°	1.085
60°	1.272
30°	1.476

Constants for Z_{thJH} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0731	0.0015
2	0.1234	0.0237
3	0.4035	0.4838
4	0.3000	1.5