


Pentoda mocy

CL 6

Wzmacniacz mocy m. cz.

Bocznostykowy

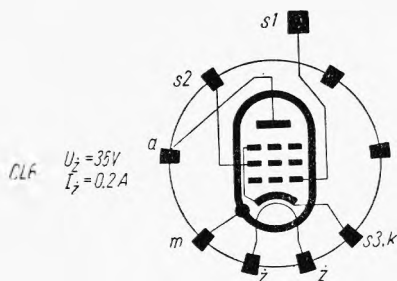

Wartości robocze

	wzm. kl. A		w ukl. przeciwsob. kl. AB		
U_a	100	200	250	200	V
U_{S2}	100	100	250	125	V
U_{S1}	-8,5	-9,5	—	—	V
$U_{S1\sim}$	5,6	5,6	13,5	11	V
I_a	50	45	36	45	mA
I_{S2}	9	5,5	4,1	5	mA
S_a	8,5	8	—	—	mA/V
ρ_a	12	22	—	—	k Ω
R_a	2	4,5	7	4,4	k Ω
R_{S2}	—	15	—	10	k Ω
R_k	140	190	365	250	Ω
$P_{a\sim}$	2,1	4	13,5	12,1	W
h		10			%

Wartości maksymalne

$U_{a\max}$	250	V
$U_{S2\max}$	125	V
$I_{k\max}$	70	mA
$P_{a\max}$	9	W
$P_{S2\max}$	1	W
$R_{S1\max}$	1	M Ω
$U_{w/k\max}$	175	V

Pojemności

$C_{S1/a}$	< 0,5	pF
------------	-------	----

TYPY PODOBNE

CL 4, CL 33, UL 84

