


# Pentoda mocy (teletransmisyjna)

# E 2 c

Siemens, RFT

Wzmacniacz mocy m. cz.

7-kołkowy spec.

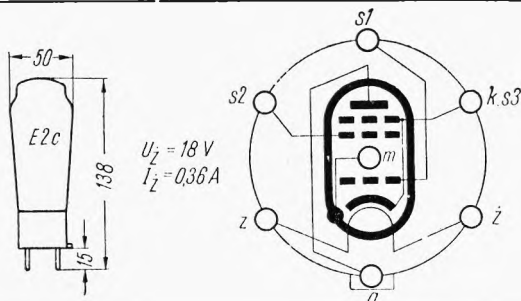

### Wartości robocze

$U_a$	220	V
$U_{s2}$	200	V
$U_{s1}$	-3,5	V
$I_a$	42	mA
$I_{s2}$	5	mA
$S_a$	10,5	mA/V
$\rho_a$	40	k $\Omega$
$R_a$	6,5	k $\Omega$
$R_k$	70	$\Omega$
$P_{a\sim}$	2	W
$h$	5	$\mu_a$

### Wartości maksymalne

$U_{amax}$	300	V
$U_{s2max}$	300	V
$P_{amax}$	10	W
$P_{s2max}$	1,5	W
$R_{s1max}$	1	M $\Omega$
$R_{s2max}$	0,2	M $\Omega$
$I_{kmax}$	75	mA

### Pojemności

$C_{wej}$	15	pF
$C_{wyj}$	12	pF
$C_{s1/a}$	0,2	pF

TYPY PODOBNE

