




PLL and CPU Board

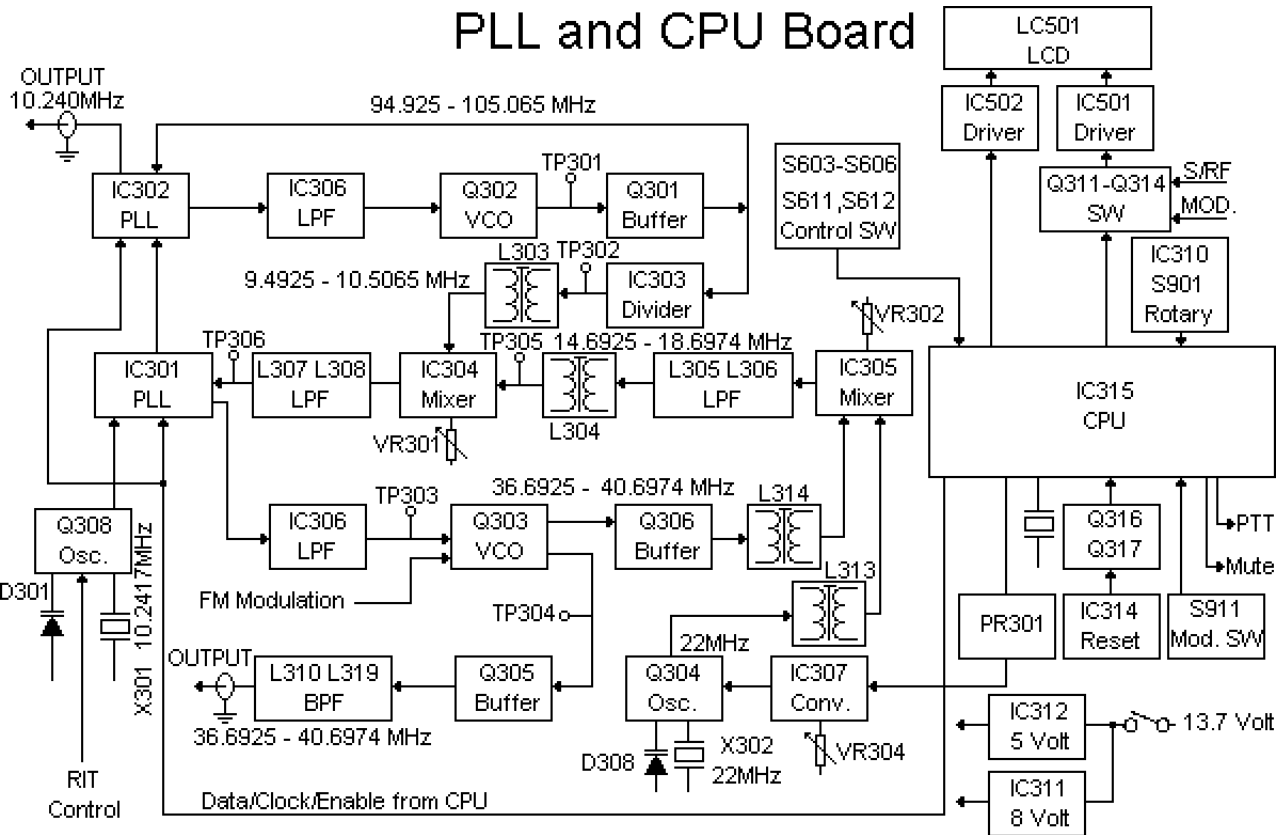


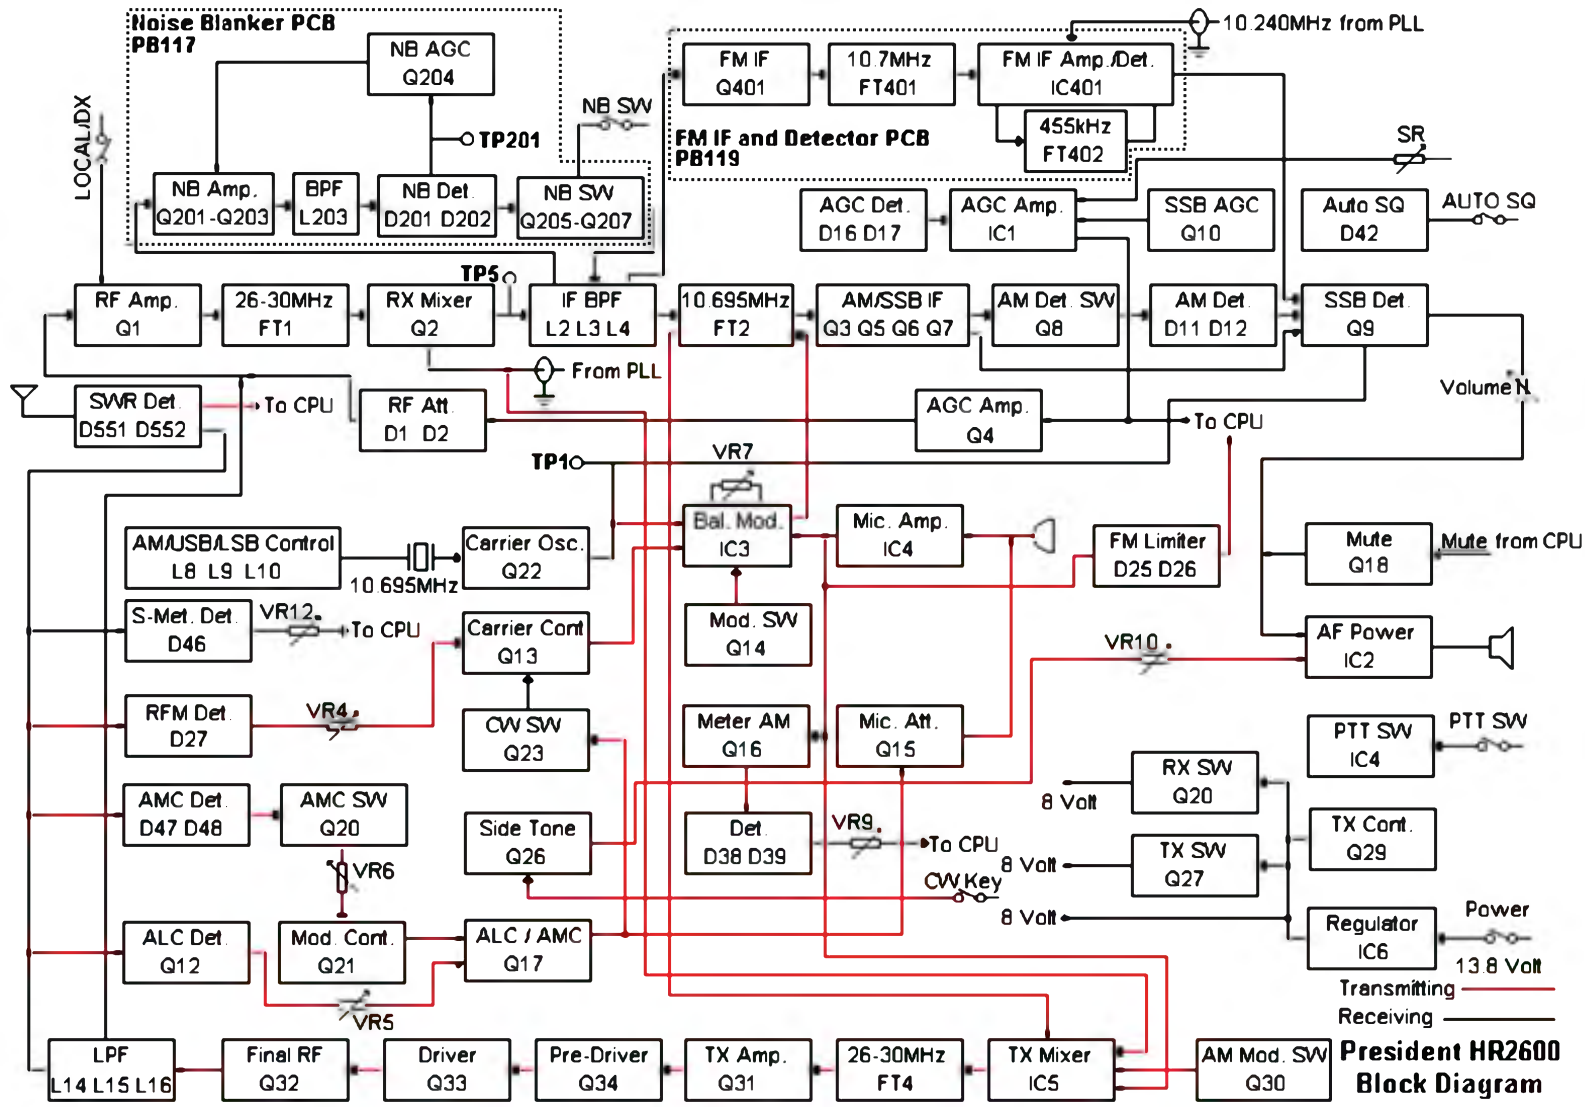

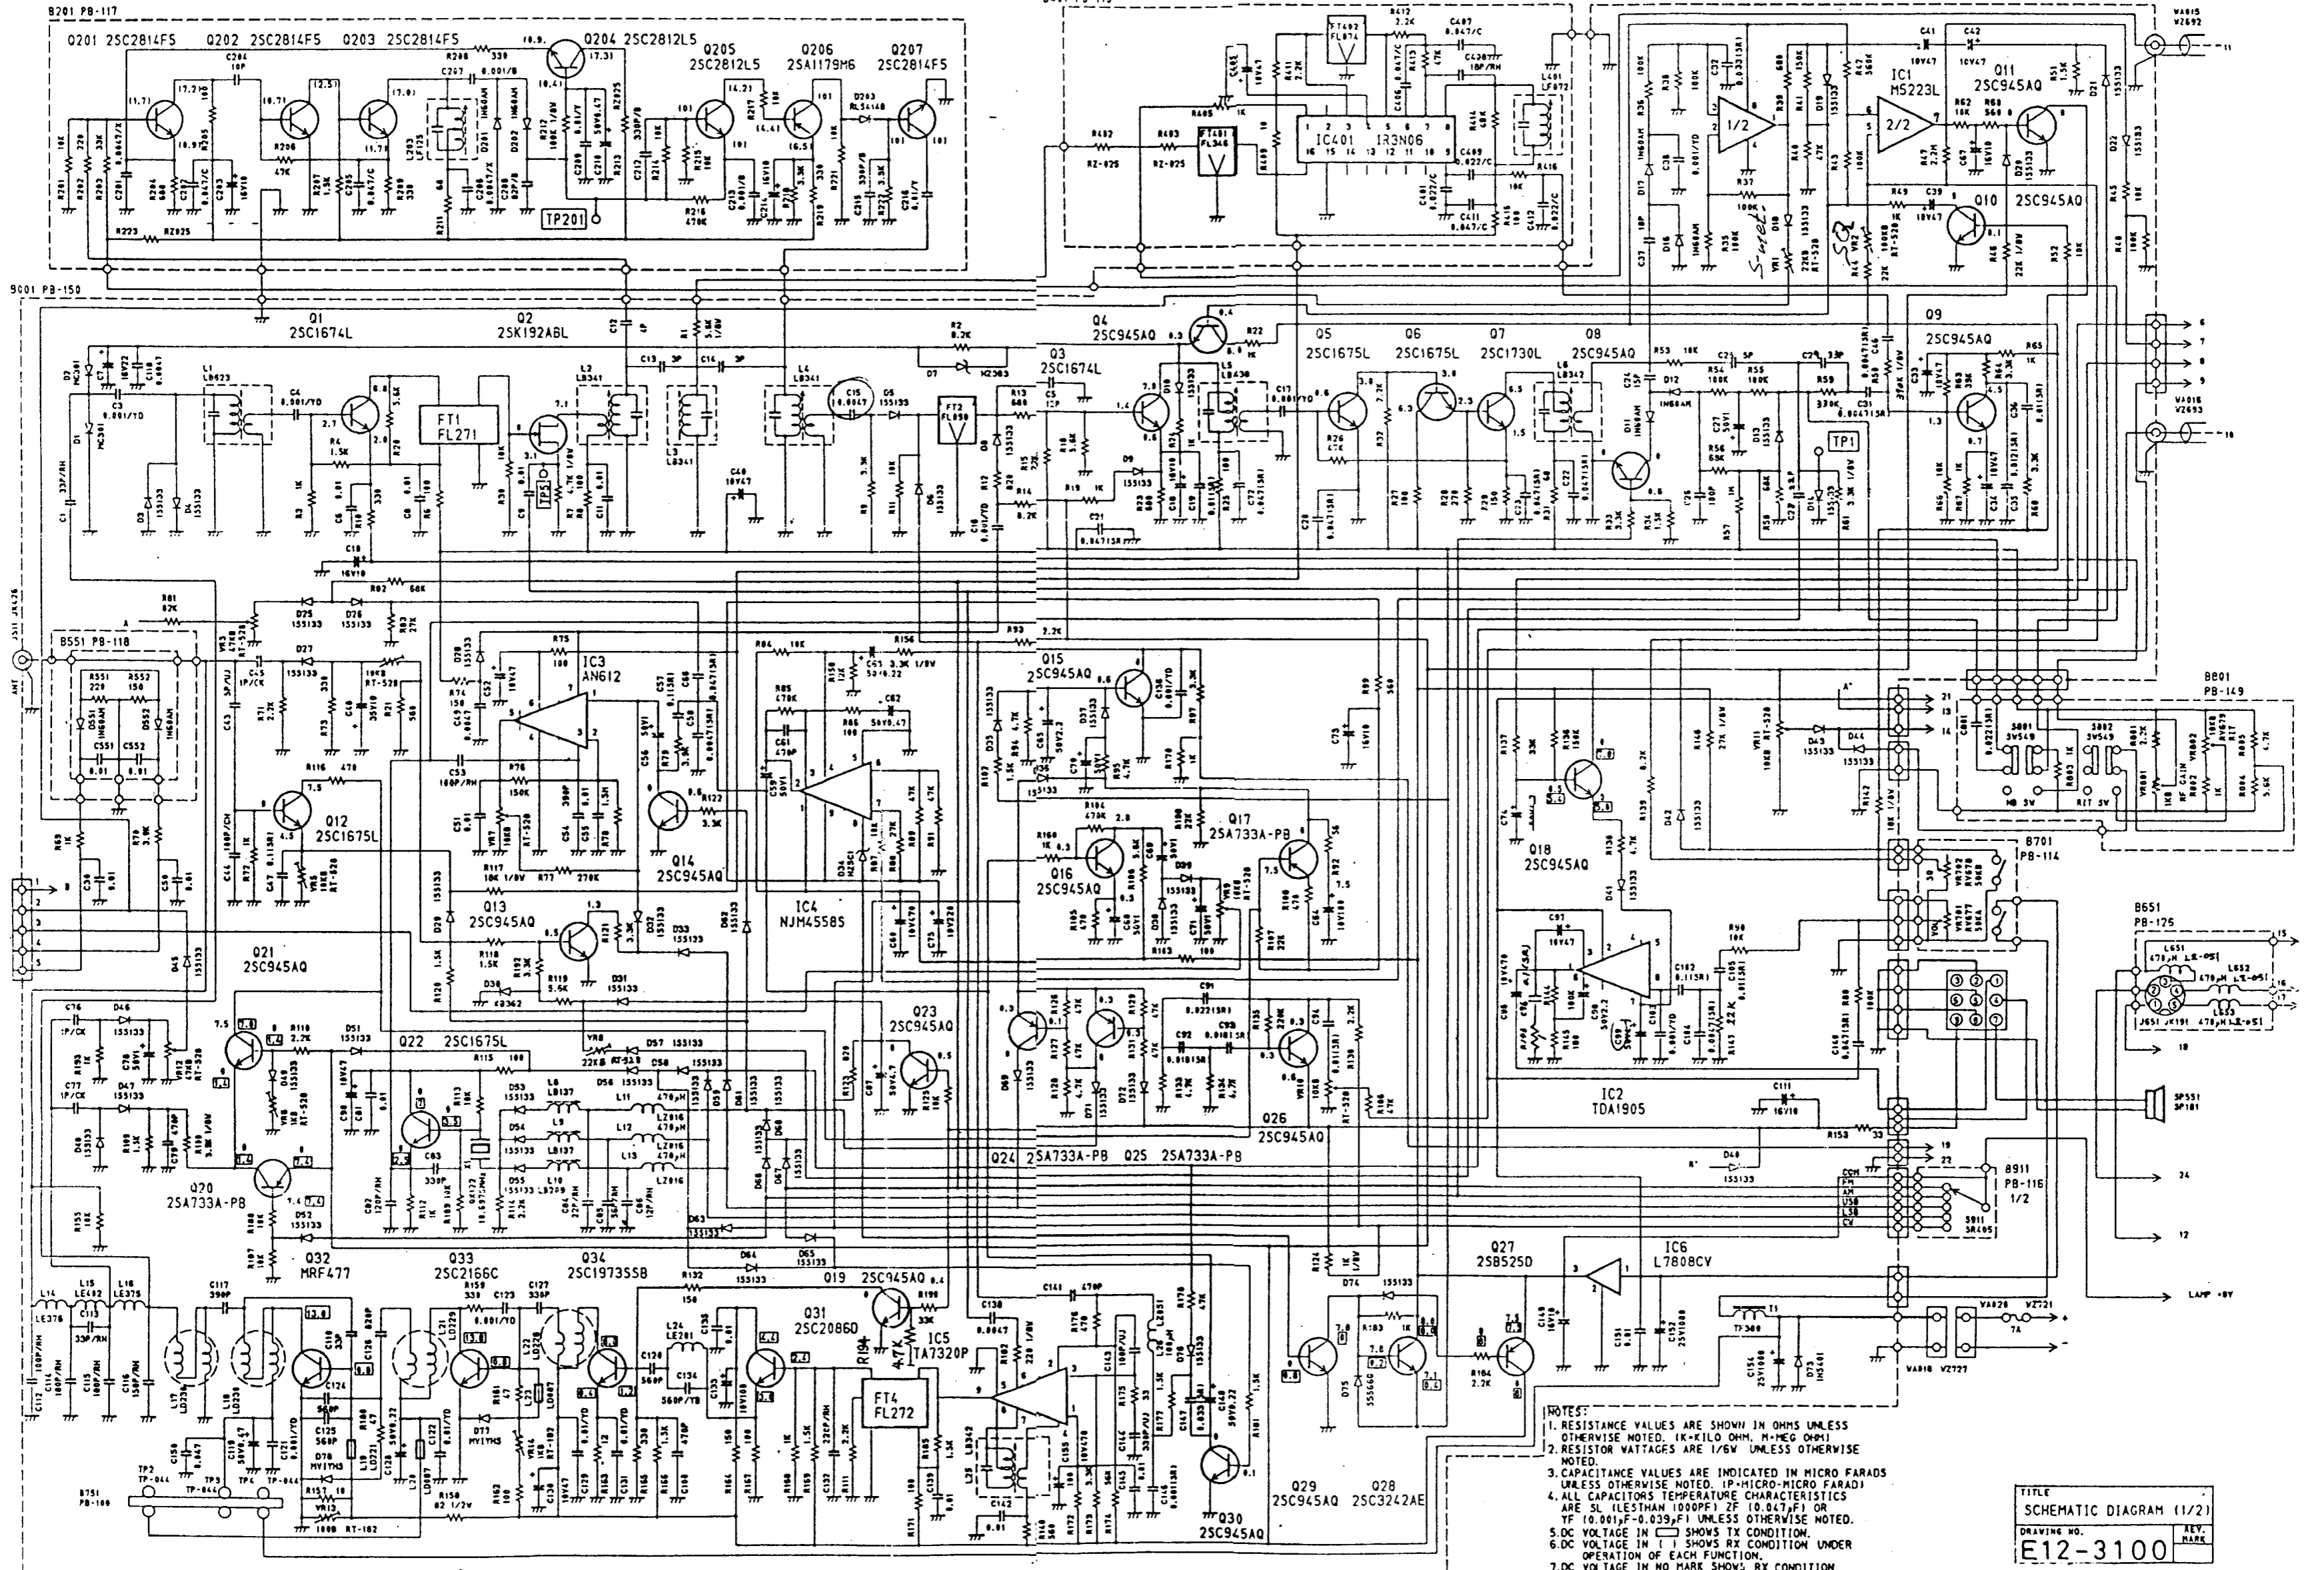

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K-KILO OHM, M-MEG OHM)
 2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P-PICO-FARAD)
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 5% (LEASTHAN 1000PF) 2F (0.047µF) OR YF (0.001µF-0.039µF) UNLESS OTHERWISE NOTED.
 5. DC VOLTAGE IN () SHOWS TX CONDITION.
 6. DC VOLTAGE IN () SHOWS RX CONDITION UNDER OPERATION OF EACH FUNCTION.
 7. DC VOLTAGE IN NO MARK SHOWS RX CONDITION.
 8. RESISTOR WATTAGES ARE 1/8W FOR B201, B401.

TITLE
SCHEMATIC DIAGRAM (1/2)
DRAWING NO.
E12-3100
REV.
MARK

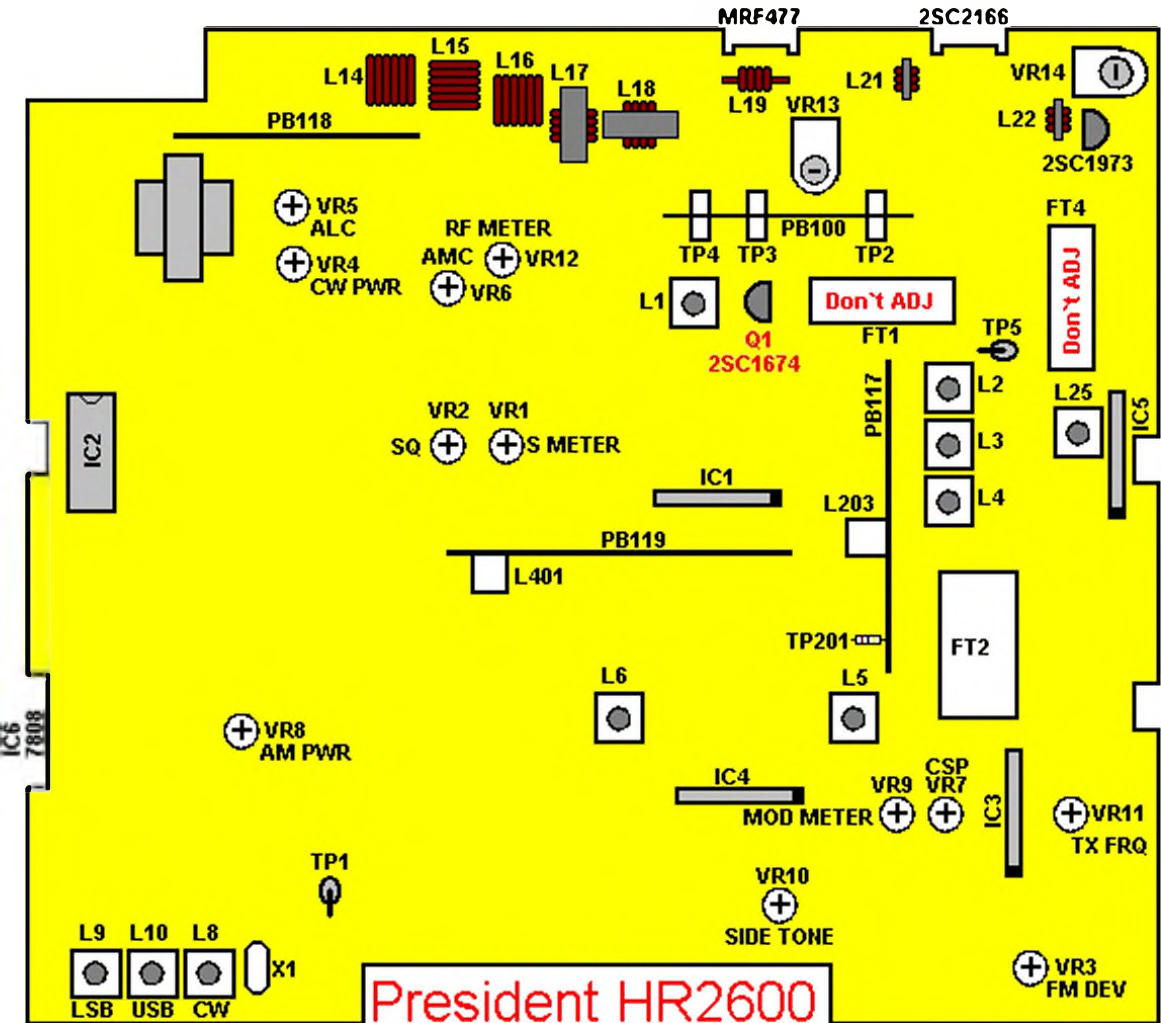

CPU and PLL Board

