


C	11 16	10 14	13 12	17	32 26	30 23	28 29	24 33	38 37	39	44 42	43 46	51 47	49 48	50 53	54	C		
L	4 7	6 5		12 13	13 8	9			14 16	17 18						L			
R			12	13			9	8 17	14 16	22	19 24	23 26	27 28	30 33	32 36 37	42 46 39 44	R		
MISC.	Sla	Slb	Slc	Sle	Sld	TR2	Sif S1g	Sih S1j	Sii S1k	TR1	TR3	TR4	XI	TR5	TI	MRI MR2 TR7	Sin S1m	2A IA 3A	MISC.

B385 & B485

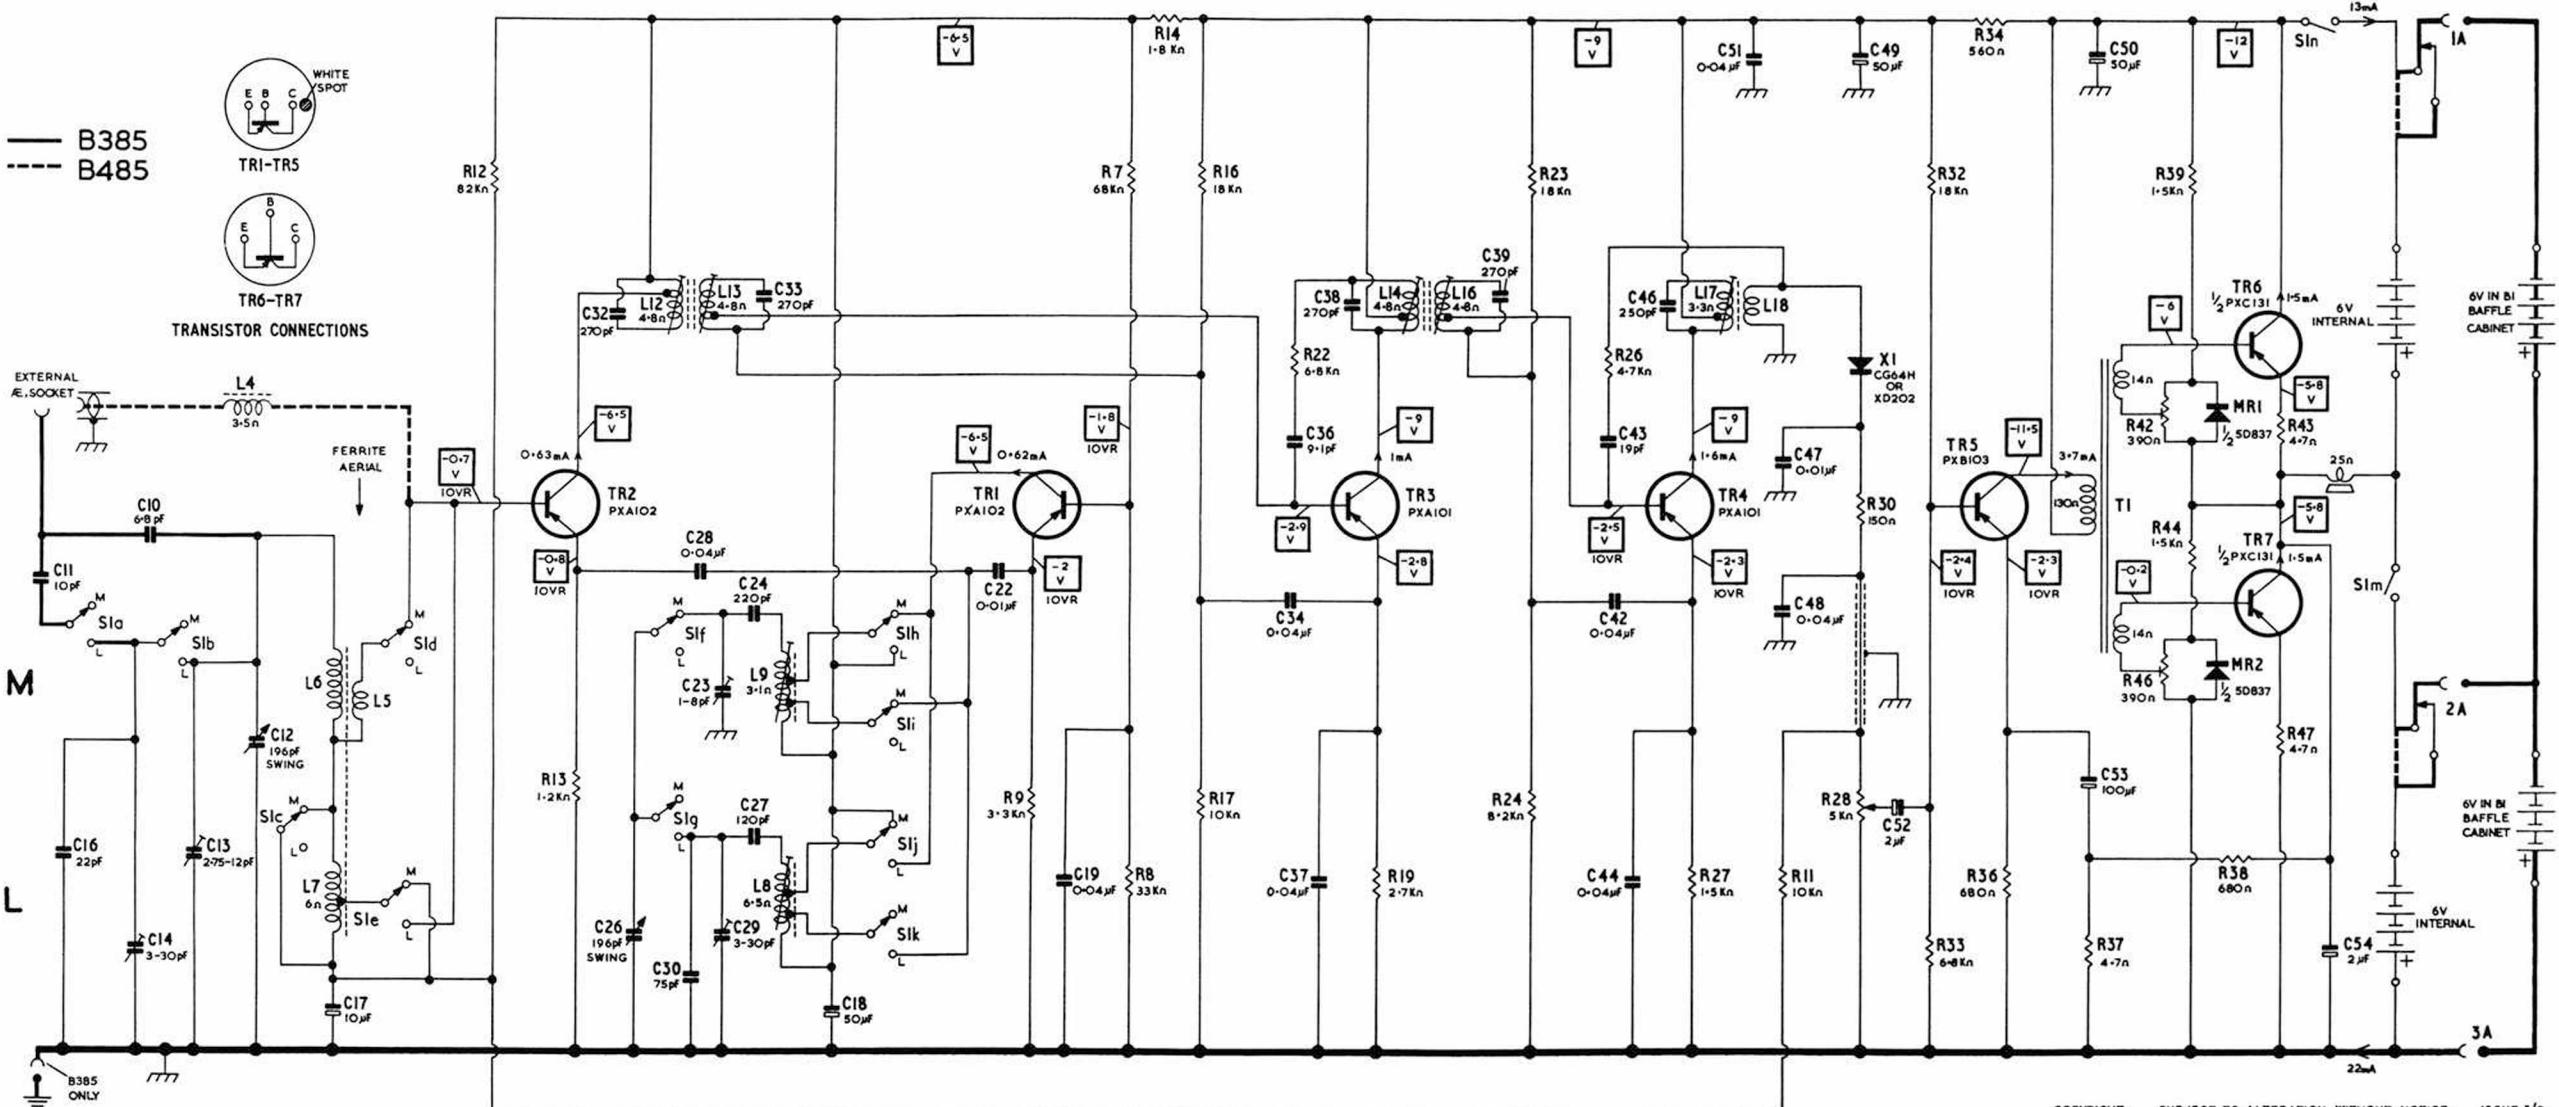

The wave-range switch is shown in the M position, and the d.c. resistance of the coils is omitted where the value is less than one ohm. Voltage and current readings were taken under no-signal conditions with the receiver switched to the M range and the

Volume control at minimum, using a 20kΩ/V meter. Where the meter range seriously affects the voltage readings, the range (e.g. 10VR) is indicated beside the squares concerned. The room temperature was about 68°F.