


Trioda UKF

EC 80

Philips

Mieszacz, wzm. w. cz. (do 500 MHz)

Nowal

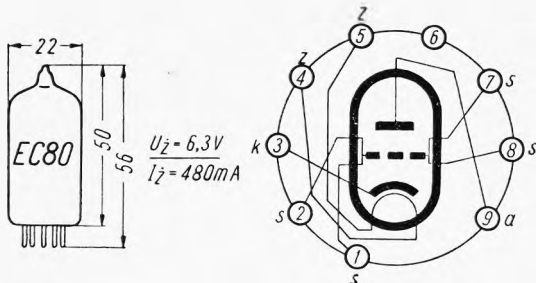


Wartości charakterystyczne

Wartości graniczne

U_a	250	V
U_s	-1,5	V
I_a	15	mA
S_a	12	mA/V
K_a	80	V/V

U_{a0max}	550	V
U_{amax}	300	V
P_{amax}	4	W
I_{kmax}	15	mA
R_{smax}	0,3	MΩ
$U_{smax}^{1)}$	-1,3	V
$U_{w/k}$	100	V
$R_{w/kmax}$	20	kΩ

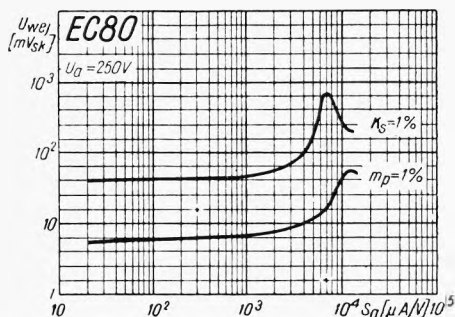

Pojemności

C_{wej}	5,1	pF ²⁾
C_{wej}	9,3	pF ³⁾
C_{wyj}	3,4	pF ²⁾
C_a/k	< 0,08	pF ³⁾
C_a/k	< 0,075	pF
C_w/k	< 8	pF

¹⁾ $I_s = +0,3 \mu A$

²⁾ (s + b) (k + z)

³⁾ k + z

TYPY PODOBNE

6 Q 4

