

CMR3-02
 CMR3-04
 CMR3-06
 CMR3-10

**GENERAL PURPOSE RECTIFIER
 3.0 AMP, 200 THRU 1000 VOLTS**



SMC CASE

CentralTM Semiconductor Corp.

FEATURES:

- LOW COST
- SPECIAL SELECTIONS AVAILABLE
- HIGH RELIABILITY
- SUPERIOR LOT TO LOT CONSISTENCY
- GLASS PASSIVATED CHIP
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 3.0 Amp Surface Mount Silicon Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications. To order devices on 16mm Tape and Reel (3000/13" Reel), add TR13 suffix to part number.

MARKING CODES: SEE MARKING CODES ON FOLLOWING PAGE

MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)


	SYMBOL	CMR3-02	CMR3-04	CMR3-06	CMR3-10	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	200	400	600	1000	V
DC Blocking Voltage	V_R	200	400	600	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	140	280	420	700	V
Average Forward Current ($T_A=75^{\circ}\text{C}$)	I_O			3.0		A
Peak Forward Surge Current (8.3ms)	I_{FSM}			200		A
Operating and Storage						
Junction Temperature	T_J, T_{stg}		-65 to +175			$^{\circ}\text{C}$
Thermal Resistance	θ_{JL}			10		$^{\circ}\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_R	$V_R=\text{Rated } V_{RRM}$		5.0	μA
I_R	$V_R=\text{Rated } V_{RRM}, T_A=125^{\circ}\text{C}$		250	μA
V_F	$I_F=3.0\text{A}$		1.2	V

**GENERAL PURPOSE RECTIFIER
3.0 AMP, 200 THRU 1000 VOLTS**

SMC CASE - MECHANICAL OUTLINE

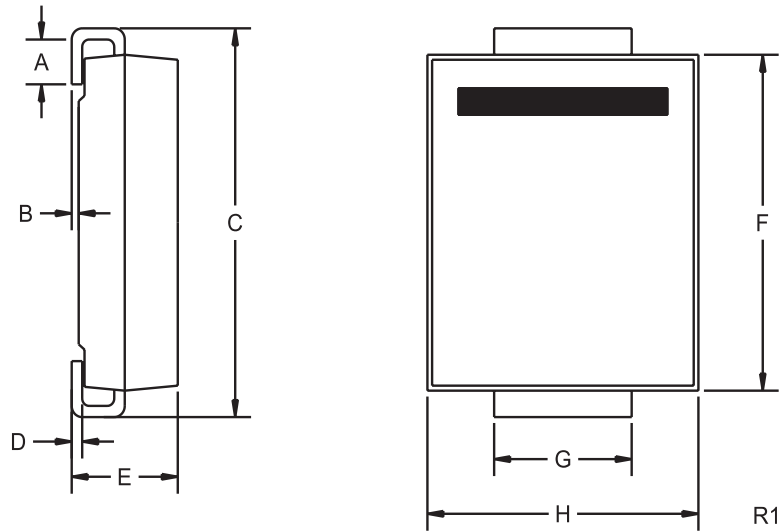

DEVICE	MARKING CODE
CMR3-02	C302
CMR3-04	C304
CMR3-06	C306
CMR3-10	C310

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.030	0.060	0.76	1.52
B	0.004	0.008	0.10	0.20
C	0.305	0.320	7.75	8.13
D	0.006	0.012	0.15	0.31
E	0.079	0.103	2.00	2.62
F	0.260	0.280	6.60	7.11
G	0.108	0.124	2.75	3.15
H	0.220	0.245	5.59	6.22

SMC (REV: R1)